Panasonic Push Switches/ESB30

### ESB30 Push Switches

# Type: **ESB30 (H=12.5 mm)**






### ■ Features

- Reduced interlock operation switching noise (-10 dB compared to the current value)
- Simultaneous locking prevention mechanism

### ■ Recommended Applications

 Operation switches for automobiles (air conditioners switches, Hazard switches, etc.)

### ■ Explanation of Part Numbers



A: 1.5 mm 1: PP (Self-lock) B: 2.5 mm 3: NL (Non-lock)

### ■ Specifications

Rating	50 μA 3 Vdc to 0.2 A 14 Vdc (Resistive load)		
Travel	Lock Travel=2.5 mm Full Travel=3.5 mm		
Mounting Height	12.5 mm		
Poles and Throws	2-poles 2-throws		
Operating Mode	Self-lock, Non-lock		
Switching Mode	Non-shorting		
Operating Force	2.0 N±1.0 N, 3.5 N±1.5 N		
Minimum Quantity/Packing Unit	480 pcs. (Tray Pack)		
Quantity/Carton	2400 pcs.		


Panasonic Push Switches/ESB30

#### ■ Standard Products

Operating Lever Force Height	Lock	Operating	Terminal Shape	
	Height	Travel	Mode	Straight
2 N±1.0 N 20.5 mm	2.5 mm	PP	ESB30B132	ESB30B102
		NL	ESB30B304	ESB30B305
3.5 N±1.5 N 20.5 mm	2.5 mm	PP	ESB30B103	ESB30B133
		NL	ESB30B332	ESB30B333

Note: PP=Self-lock, NL=Non-lock

### ■ Dimensions in mm (not to scale)

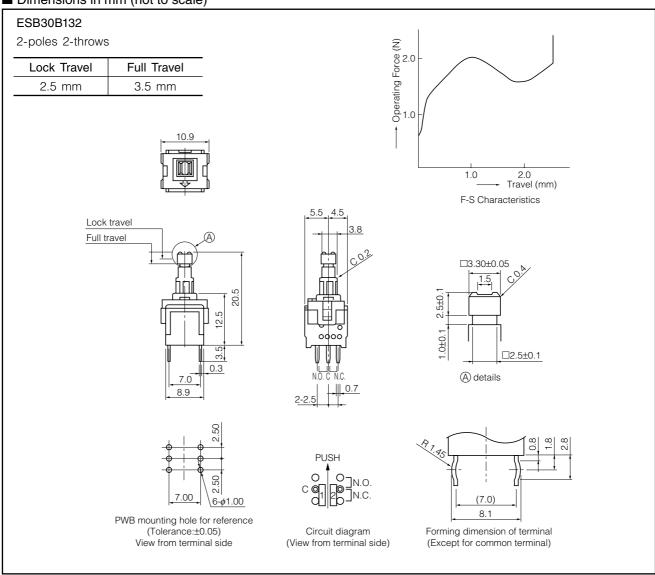

### ■ Application Notes:

• Operating force should be applied at the center of the lever.

# AMEYA360 Components Supply Platform

# **Authorized Distribution Brand:**

























# Website:

Welcome to visit www.ameya360.com

## Contact Us:

# > Address:

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd Minhang District, Shanghai , China

## > Sales:

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

## Customer Service :

Email service@ameya360.com

# Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com