

10 9 8 7 6 5 4 3 2 1

注記
NOTES

1. 材質

MATERIAL

ハウジング : ポリアミド (PA)、ガラス充填、UL94V-0、白色

HOUSING : POLYAMIDE(PA), GLASS FILLED, UL94V-0, WHITE

ターミナル : りん青銅

銅めっき : 1.0μm以上

下地 : ニッケルめっき 1.0μm以上

TERMINAL : PHOSPHOR BRONZE

TIN PLATING : 1.0 MICROMETER MINIMUM

UNDERPLATE : NICKEL 1.0 MICROMETER MINIMUM

ネイル : りん青銅

銅めっき : 1.0μm以上

下地 : ニッケルめっき 1.0μm以上

NAIL : PHOSPHOR BRONZE

TIN PLATING : 1.0 MICROMETER MINIMUM

UNDERPLATE : NICKEL 1.0 MICROMETER MINIMUM

2. 嵌合相手 : 503469-****又は503473-****

MATE WITH : 503469-**** OR 503473-****

3. 端子テール部及びネイルの平坦度は0.1以下

TAIL AND NAIL COPLANARITY TO BE 0.1 MAXIMUM.

4. 端子テール部及びネイルに銅めっきを使用しているため、外観に摺動痕が付く場合があります。

THE WOUND OF FRICTION MIGHT ADHERE TO EXTERNALS

BECAUSE THE TIN PLATING IS USED FOR THE TAIL AND NAIL.

5. 本製品のプラスチック部に黒点等が確認される場合や色合いが異なる場合がありますが、製品性能に影響はありません。

THERE IS NO INFLUENCE IN THE PRODUCT PERFORMANCE THOUGH

THE BLACK SPOT ETC. MIGHT BE CONFIRMED TO THE PLASTIC PART







OF THIS PRODUCT AND THE SHADE MIGHT BE DIFFERENT.

6. エンボス梱包品の詳細はSD-503471-002を参照願います。

REFER TO THE SD-503471-002 FOR EMBOSSED TAPE PACKAGING.

7. ELV及びRoHS適合品

ELV AND RoHS COMPLIANT.

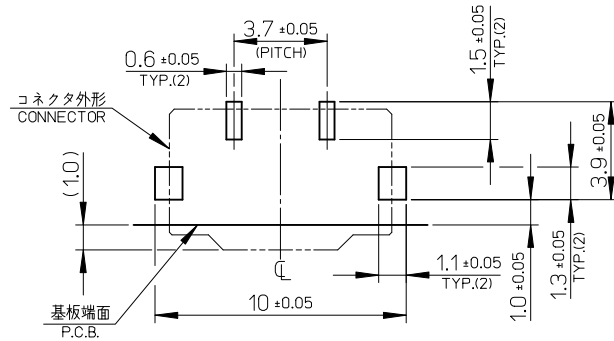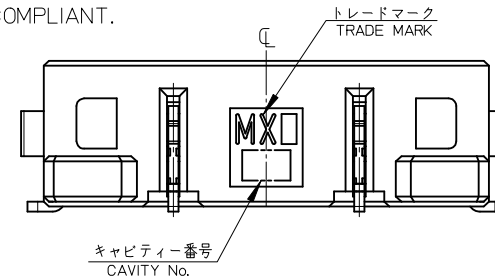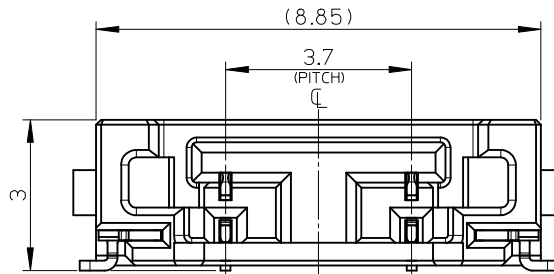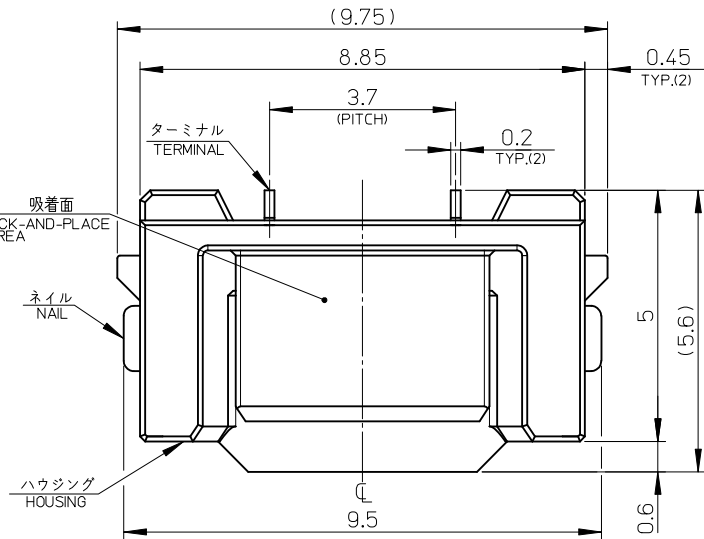

基板パターンレイアウト (参考)
P.C.B. PATTERN LAYOUT (REFERENCE)
(SCALE : 5-1)

503471-0200	2
EMBOSSD TAPE PACKAGE	CIRCUIT 極数
オーダー番号 ORDER No.	
コネクタシリーズ番号 CONNECTOR SERIES No.	503471-**09

RELEASED EC NO: J2010-0155 DRAWN:KOBAYASHI CHKD:SSA1003 APPR:NUKITA	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 10:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± 0.2	DRAWN BY H.KOBAYASHI	DATE 2009/7/24	TITLE 3.7 MULTIPLE CONN. REC. HS'G ASS'Y				
		10 OVER 30 UNDER	± 0.25	CHECKED BY S. SATO	DATE 2009/7/24					
		30 OVER	± 0.3	APPROVED BY N. UKITA	DATE 2009/7/24					
		ANGULAR ±1 °		MATERIAL NO. —//—		MOLEX MOLEX INCORPORATED				
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A3		DOCUMENT NO. SD-503471-001					
	REV			SHEET NO. 1 OF 2						
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										

10

9

8

7

6

5

4

3

2

1

F

E



D

C



B

A

<嵌合状態図 (参考)> 503471-****/503469-****
<MATED CONNECTOR (REFERENCE)>
(503471-****/503469-****)

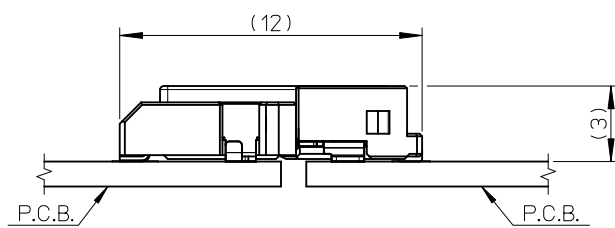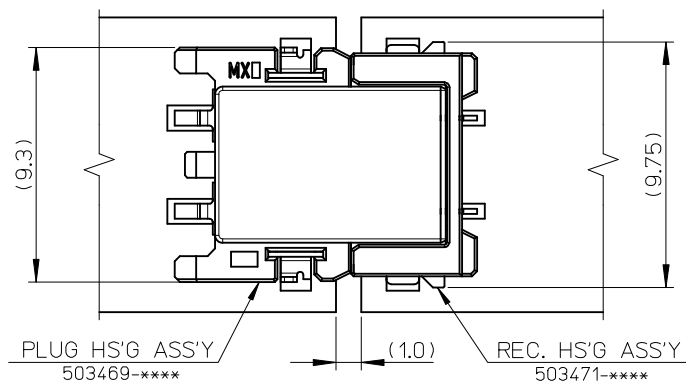

<嵌合状態図 (参考)> 503471-****/503473-****
<MATED CONNECTOR (REFERENCE)>
(503471-****/503473-****)

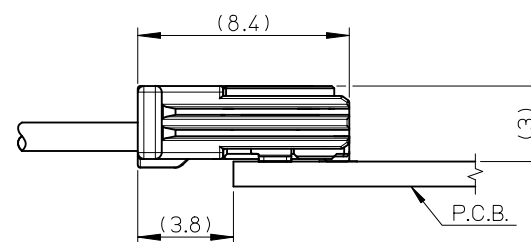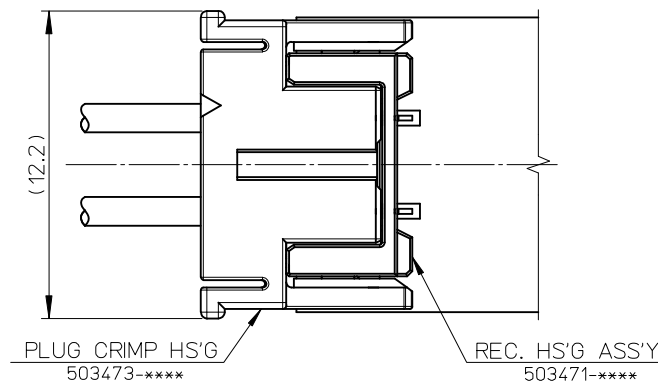

F

E

D

C

B

A

9

8

7

6

5


4

3



2

注記:
NOTES;

- 製品詳細寸法については、SD-503471-001を参照下さい。
PLEASE REFER TO SD-503471-001 FOR THE DETAILED DIMENSION OF THE CONNECTOR.
- 梱包数量: 2000個/リール
NUMBER OF CONNECTORS: 2000 PCS/REEL.
- リードテープ長さ
LEAD TAPE LENGTH.

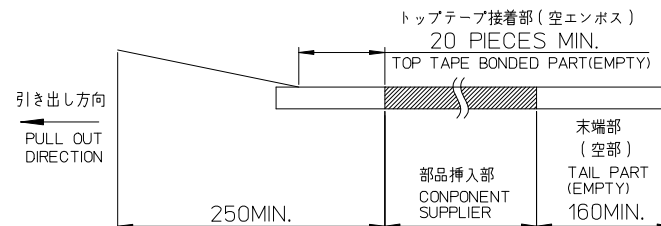

- 材料
MATERIAL
キャリアテープ: ポリスチレン
CARRIER TAPE: POLYSTYRENE
トップテープ: ポリエステル, ポリエチレン, ポリエチレンテレフタレート
TOP TAPE: POLYESTER, POLYETHYLENE, POLYETHYLENE TEREPHTHALATE
リール: ポリスチレン <リサイクル材含む>
REEL: POLYSTYRENE (PS) <RECYCLE MATERIAL CONTAINED>
- ELV及びRoHS適合品
ELV AND RoHS COMPLIANT

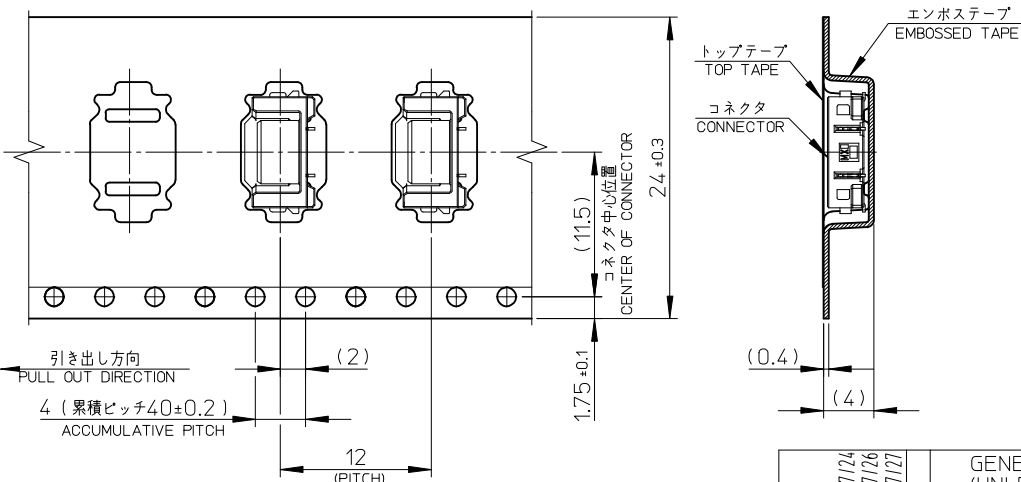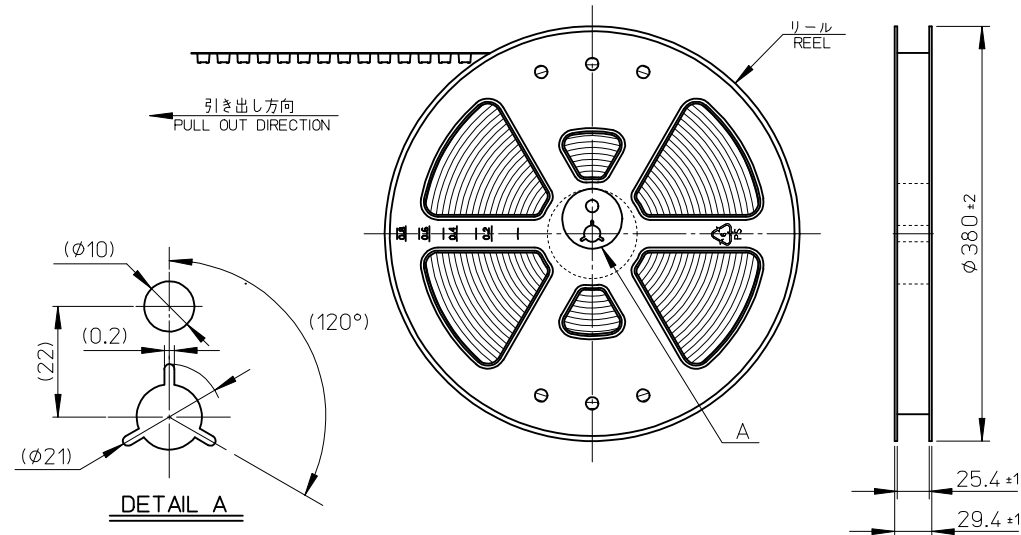

エンボステープ内の製品の向き
DIRECTION OF PRODUCTION IN THE
EMBOSSED TAPE

24mm	503471-0209	503471-0200	2
エンボステープ幅 CARRIER TAPE WIDTH	装着コネクタ CONNECTOR	EMBOSSED TAPE PACKAGE	CIRCUIT 極数
		オーダー番号 ORDER No.	
		コネクタシリーズ番号 CONNECTOR SERIES No.	
			503471-***00

RELEASED EC NO: J2010-0155 DRAWN:KOBAYASHI CHKD:SSATO03 APPR:NUKITA	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE -----	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± 0.2	DRAWN BY H.KOBAYASHI	DATE 2009/7/24	TITLE EMBOSSED TAPE PACKAGE FOR 503471-****				
		10 OVER 30 UNDER	± 0.25	CHECKED BY S.SATO	DATE 2009/7/24					
		30 OVER	± 0.3	APPROVED BY N.UKITA	DATE 2009/7/24	MOLEX INCORPORATED				
		ANGULAR	±1 °	MATERIAL NO. ——//——						
REV		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com