


THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
B	Updated Notes and Graphics	10-21-14	LY

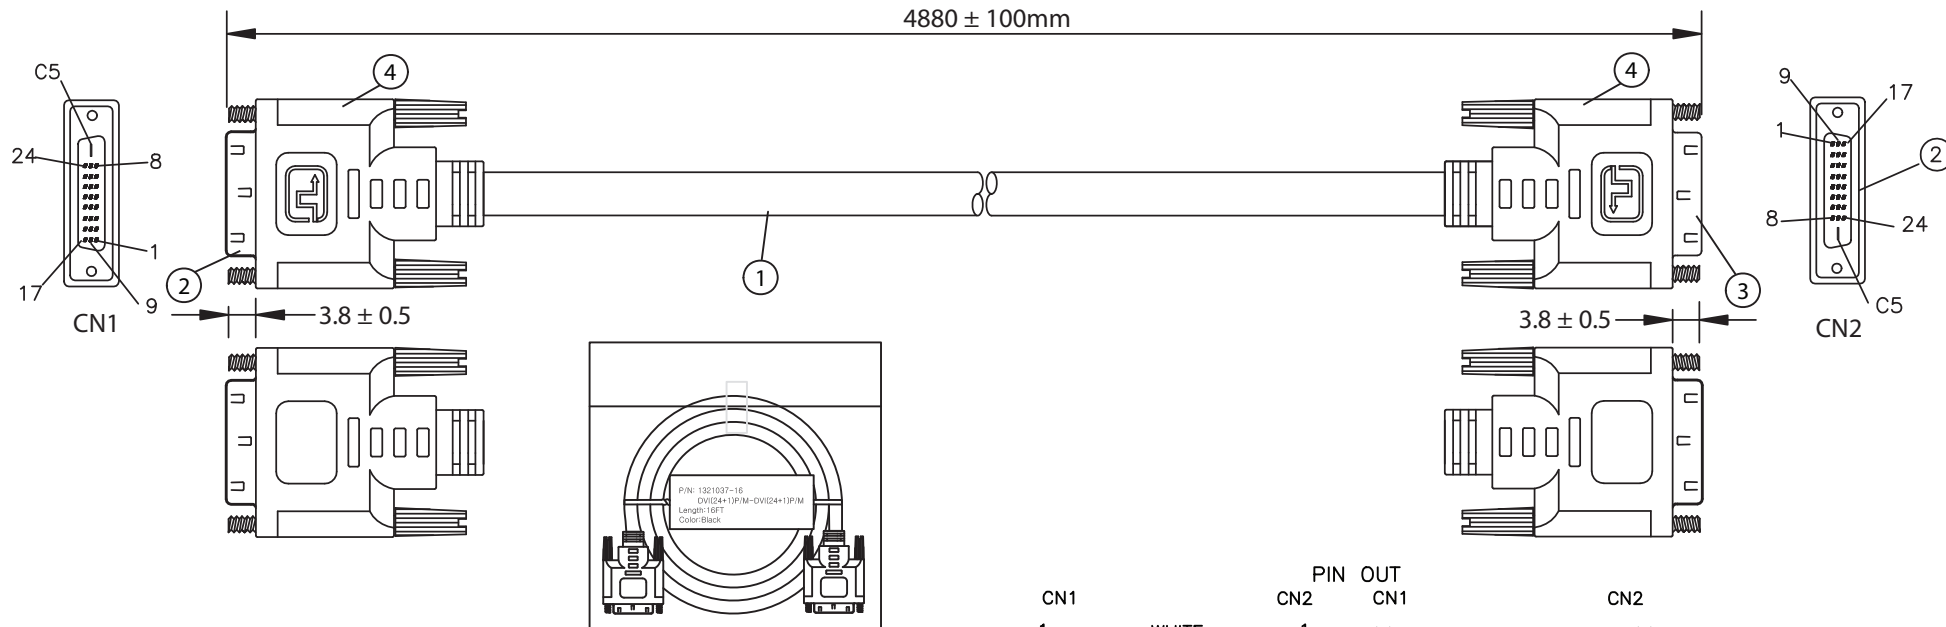

NOTES:

- CABLE: UL20276
(28AWG*1PR+EAM)*7+28AWG*1PR+28AWG*3C+AEB(AL) 65%
OUTER JACKET: BLACK, OD: 8.5 ± 0.2mm
- CONNECTOR: DVI 24+1 MALE
INSULATOR: BLACK
PIN G/F
GOLD PLATED SHELL
THUMB SCREW: 2.8*32 4-40UNC
- CONNECTOR: DVI 24+1 MALE
INSULATOR: BLACK
PIN G/F
GOLD PLATED SHELL
THUMB SCREW: 2.8*32 4-40UNC
- PVC MOLDED: COLOR V398 30P BLACK
- ELECTRICAL TEST:
<1>.100% OPEN SHORT & MISS WIRE TEST
<2>.INSULATION RESISTANCE: AC300V DC400V 10M ohm MIN.
<3>.CONDUCTOR RESISTANCE: 4 ohm MAX.
- PACKING: 1PC/POLYBAG

CN1		CN2	
1	WHITE	14	RED
2	GREEN	15	VIOLET
3	DRAIN	16	WHITE
4	DRAIN	17	PINK
5	BLUE	18	ORANGE
6	YELLOW	19	DRAIN
7	ORANGE	20	BLACK
9	WHITE	21	GRAY
10	RED	23	LIGHT-BLUE
11	DRAIN	24	VIOLET
12	DRAIN	22	DRAIN
13	BROWN	SHELL	BRAID & DRAIN

CONTROLLED

Dim range (mm)		Tolerance +/- (mm)		Qualtek Electronics Corp. WCI DIVISION		
0-1		0.15		Part Number: 1321037-16		
1-6		0.20		Description: DVI (24+1)P/M - DVI (24+1)P/M		
6-18		0.30		UNIT: mm		
18-50		0.50		REV.B		
50-120		0.70		Drawn / Date	Checked / Date	Approved / Date
120-250		0.90		B.Grubb 01-25-07	01-25-07	JJH / 01-25-07
250-500		1.20				

RoHS
Compliant

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com