

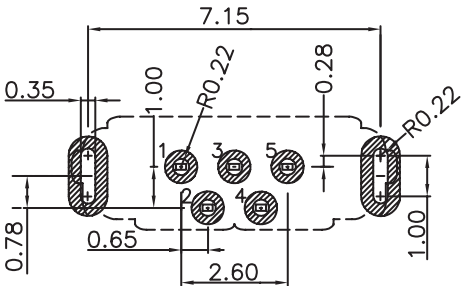
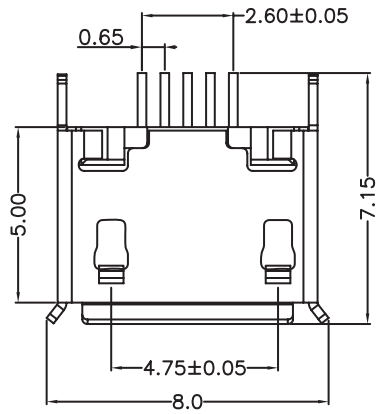
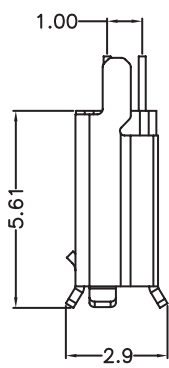


1	2	3	4	5
---	---	---	---	---



RECOMMENDED PCB LAYOUT
RECOMMENDED PCB THICKNESS : 1.0 mm

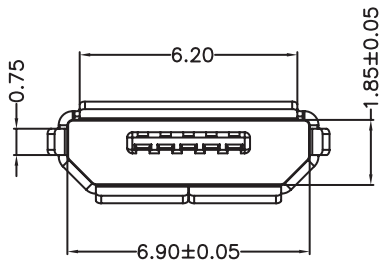

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR: LCP
FLAMMABILITY RATING: UL94-V0
COLOR: BLACK
CONTACT MATERIAL: COPPER ALLOY
CONTACT TYPE: STAMPED
CONTACT PLATING: GOLD
SHIELDING: STAINLESS STEEL MATT TIN PLATED
QUALITY CLASS: 10000 MATING CYLCES



ENVIRONMENTAL
OPERATING TEMPERATURE: -40°C UP TO +85°C
COMPLIANCE: LEAD FREE AND ROHS


ELECTRICAL
CURRENT RATING: 1.8 A PIN1 & PIN 5
1.0 A OTHER PINS
WORKING VOLTAGE: 30 VAC
INSULATION RESISTANCE: >1000 MΩ
WITHSTANDING VOLTAGE: 100 VAC/MIN
CONTACT RESISTANCE: 30 mΩ MAX



SOLDERING
JEDEC LEAD FREE WAVE SOLDERING

PACKAGING
TAPE & REEL

NOTE: TAPE & REEL NOT FOR PICK & PLACE MACHINE

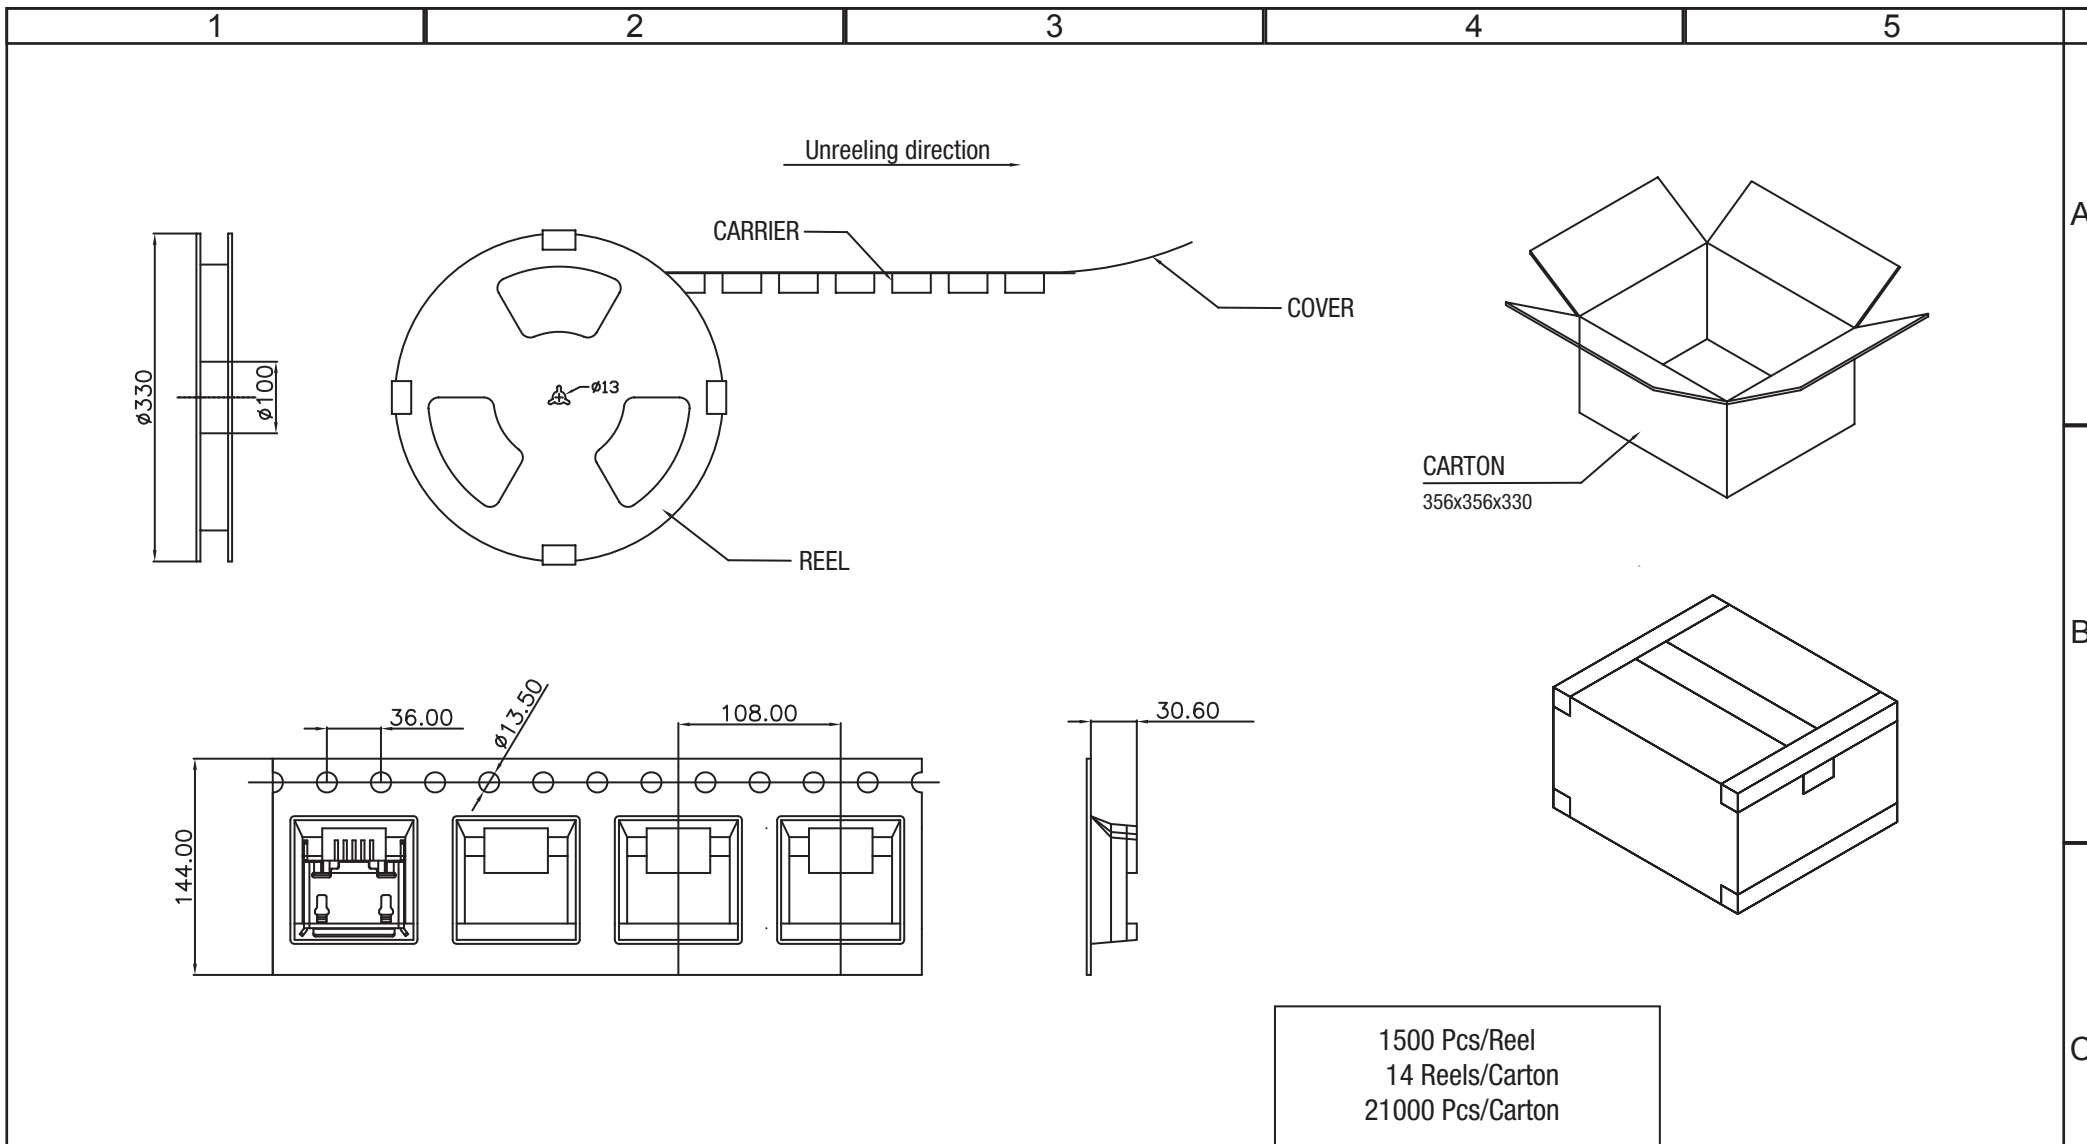RoHS Compliant				<div>PROJECTION:</div> <div></div>	<div>GENERAL TOLERANCE</div> <div>.X = +/- 0.3</div> <div>.XX = +/- 0.20</div>	<div></div>		
G								
F								
E								
D				APPROVAL: NPr	UNIT: MM	DESCRIPTION: MICRO USB 2.0 TYPE B - VERTICAL - THT		SIZE A4
C	09-AVR-15	PCB THIKNESS	QP		SCALE:			
B	27-OCT-14	REVIEW	QL		SHEET: 1/3	WERI PART NO: 614 105 150 721		
A	29-JUL-14	PDF	AS		DRAW: AS			
REV	DATE	FILE	BY					



RoHS Compliant				<div>PROJECTION:</div> <div></div>	<div>GENERAL TOLERANCE</div> <div>.X = \pm 0.2</div> <div>.XX = \pm 0.15</div>	<div></div>		
G								
F								
E								
D								
C				APPROVAL: NPr	UNIT: MM	DESCRIPTION: MICRO USB 2.0 TYPE B - VERTICAL - THT		SIZE A4
B					SCALE:			
A	23-JUL-14	PDF	AS		SHEET: 2/3	WERI PART NO: 614 105 150 721		
REV	DATE	FILE	BY		DRAW: AS			

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com