

SAW Components

SAW IF filter

WCDMA

Series/type:	B5070
Ordering code:	B39171-B5070-H810
Date:	Sep 24, 2007
Version:	2.0

SAW Components

B5070

SAW IF filter

167.0 MHz

Data sheet



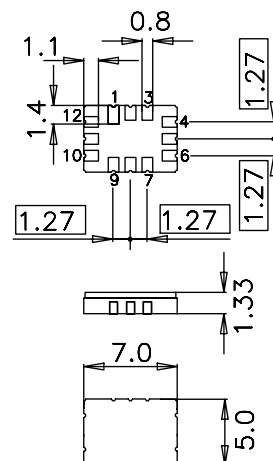
Application

- Low-loss IF filter for WCDMA base station
- Usable passband 15 MHz
- Balanced or unbalanced operation possible



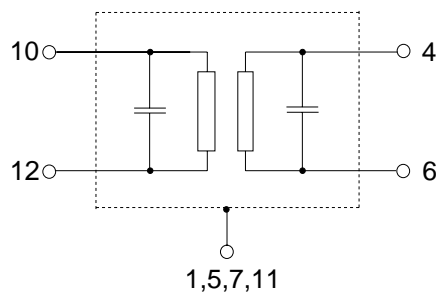
Features

- Package size 7.0 x 5.0 x 1.33 mm³
- Package code QCC12E
- RoHS compatible
- Approx. weight 0.25 g
- Ceramic package for **Surface Mount Technology (SMT)**
- Ni, gold-plated terminals
- **Electrostatic Sensitive Device (ESD)**
- Filter surface passivated



Pin configuration

- 10 Input
- 12 Input ground or input balance
- 4 Output
- 6 Output ground or output balance
- 2, 3, 8, 9 To be grounded
- 1, 5, 7, 11 Case ground



SAW Components
B5070
SAW IF filter
167.0 MHz
Data sheet

Characteristics

Operating temperature range: $T = -10$ to $85\text{ }^{\circ}\text{C}$
 Terminating source impedance: $Z_S = 50\ \Omega$ and matching network
 Terminating load impedance: $Z_L = 50\ \Omega$ and matching network

		min.	typ. @ 25 °C	max.	
Nominal frequency	f_N	—	167.0	—	MHz
Minimum insertion attenuation (including matching network)	α_{\min}	—	7.3	8.5	dB
Maximum insertion attenuation (including matching network) $f_N \pm 7.5$ MHz	α_{\max}	—	7.7	9.5	dB
Passband width	$\alpha_{\text{rel}} \leq 1.0$ dB $B_{1\text{dB}}$	15.0	18.1	—	MHz
Amplitude ripple (p-p)	$\Delta\alpha$ $f_N \pm 7.5$ MHz	—	0.4	1.0	dB
Average Error Vector Magnitude	EVM				
	$f_N \pm 1.92$ MHz	—	0.7	3.0	%
	$f_N - 5$ MHz ± 1.92 MHz	—	0.9	4.0	%
	$f_N + 5$ MHz ± 1.92 MHz	—	0.9	4.0	%
	$f_{N,\text{CDMA}(k)^1} \pm 0.6144$ MHz	—	0.7	4.0	%
Return Loss					
Input	$f_N \pm 7.5$ MHz	10.0	15.0	—	dB
Output	$f_N \pm 7.5$ MHz	10.0	19.0	—	dB
Input IP3		40	—	—	dBm
Relative attenuation (relative to α_{\min})	α_{rel}				
	$f_N - 10.0$ MHz ... $f_N - 15.0$ MHz	0.5	4.0	—	dB
	$f_N + 10.0$ MHz ... $f_N + 15.0$ MHz	1.5	5.7	—	dB
	$f_N \pm 15.0$ MHz ... $f_N \pm 20.0$ MHz	25	46	—	dB
	$f_N \pm 20.0$ MHz ... $f_N \pm 57.0$ MHz	40	50	—	dB
Temperature coefficient of frequency	TC_f	—	-87	—	ppm/K

¹⁾ $f_{N,\text{CDMA}(k)} = 160.125\text{MHz} + k \cdot 1.25\text{MHz}$; $k = (0, 1, \dots, 11)$

SAW Components
B5070
SAW IF filter
167.0 MHz
Data sheet

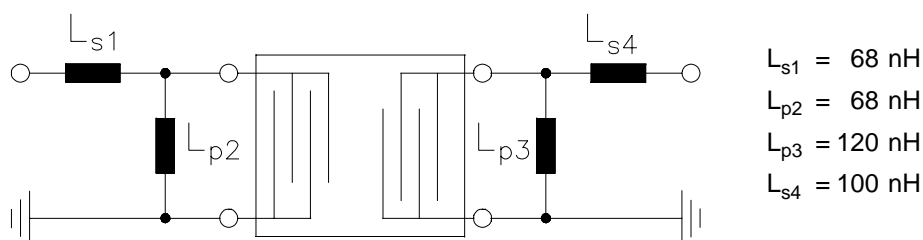
Characteristics

Operating temperature range: $T = -40$ to $85\text{ }^{\circ}\text{C}$
 Terminating source impedance: $Z_S = 50\ \Omega$ and matching network
 Terminating load impedance: $Z_L = 50\ \Omega$ and matching network

		min.	typ. @ 25 °C	max.	
Nominal frequency	f_N	—	167.0	—	MHz
Minimum insertion attenuation (including matching network)	α_{\min}	—	7.3	8.5	dB
Maximum insertion attenuation (including matching network) $f_N \pm 7.5$ MHz	α_{\max}	—	7.7	9.5	dB
Passband width	$\alpha_{\text{rel}} \leq 1.0$ dB $B_{1\text{dB}}$	15.0	18.1	—	MHz
Amplitude ripple (p-p)	$\Delta\alpha$ $f_N \pm 7.5$ MHz	—	0.4	1.0	dB
Average Error Vector Magnitude	EVM				
	$f_N \pm 1.92$ MHz	—	0.7	3.0	%
	$f_N - 5$ MHz ± 1.92 MHz	—	0.9	4.0	%
	$f_N + 5$ MHz ± 1.92 MHz	—	0.9	4.0	%
	$f_{N,\text{CDMA}(k)^1} \pm 0.6144$ MHz	—	0.7	4.0	%
Return Loss					
	Input $f_N \pm 7.5$ MHz	10.0	15.0	—	dB
	Output $f_N \pm 7.5$ MHz	10.0	19.0	—	dB
Input IP3		40	—	—	dBm
Relative attenuation (relative to α_{\min})	α_{rel}				
	$f_N - 10.0$ MHz ... $f_N - 15.0$ MHz	0.5	4.0	—	dB
	$f_N + 10.0$ MHz ... $f_N + 15.0$ MHz	0.5	5.7	—	dB
	$f_N \pm 15.0$ MHz ... $f_N \pm 20.0$ MHz	25	46	—	dB
	$f_N \pm 20.0$ MHz ... $f_N \pm 57.0$ MHz	40	50	—	dB
Temperature coefficient of frequency	TC_f	—	-87	—	ppm/K

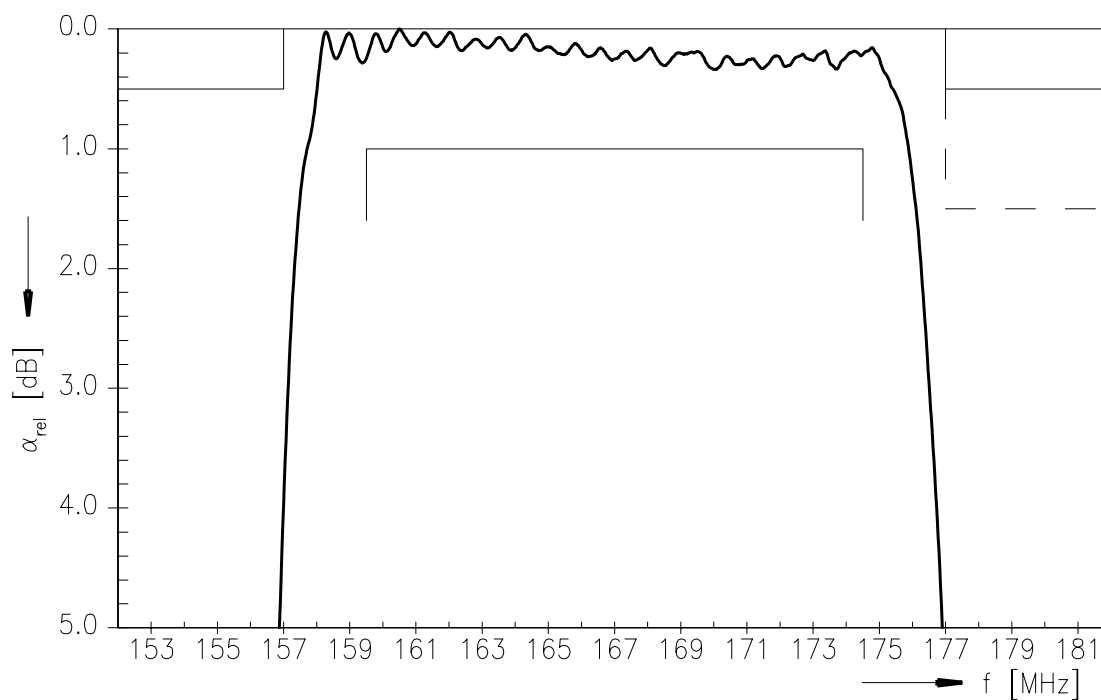
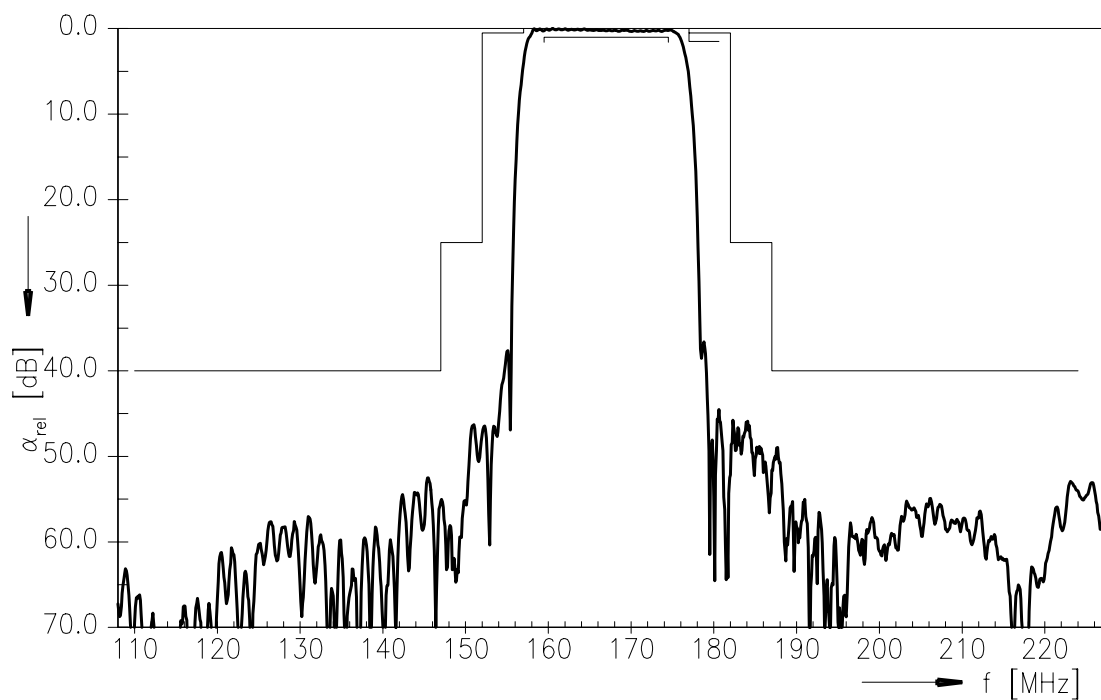
¹⁾ $f_{N,\text{CDMA}(k)} = 160.125\text{MHz} + k \cdot 1.25\text{MHz}$; $k = (0, 1, \dots, 11)$

SAW Components
B5070
SAW IF filter
167.0 MHz
Data sheet

Matching network to 50 Ω unbalanced

Maximum ratings

Operable temperature range	T	-40/+85	°C	machine model, 1 pulse for max. 100 hours
Storage temperature range	T _{stg}	-40/+85	°C	
DC voltage	V _{DC}	0	V	
ESD voltage	V _{ESD}	200 ¹⁾	V	
Input power	P _{IN}	10	dBm	
Input peak power	P _{IN,peak}	23	dBm	

¹⁾ acc. to J-STD22A-0115A (machine model, 1 pulse +/-).

Transfer function

Transfer function (wideband)


SAW Components**B5070****SAW IF filter****167.0 MHz**

Data sheet

**References**

Type	B5070
Ordering code	B39171-B5070-H810
Marking and package	C61157-A7-A103
Packaging	F61074-V8170-Z000
Date codes	L_1126
S-parameters	
Soldering profile	S_6001
RoHS compatible	defined as compatible with the following documents: "DIRECTIVE 2002/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 27 January 2003 on the restriction of the use of certain hazardous substances in electrical and electronic equipment. 2005/618/EC from April 18th, 2005, amending Directive 2002/95/EC of the European Parliament and of the Council for the purposes of establishing the maximum concentration values for certain hazardous substances in electrical and electronic equipment."

For further information please contact your local EPCOS sales office or visit our webpage at www.epcos.com.

Published by EPCOS AG
Surface Acoustic Wave Components Division
P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2007. This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.

Please read *cautions and warnings and important notes* at the end of this document.

Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of passive electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of a passive electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of a passive electronic component.
3. The warnings, cautions and product-specific notes must be observed.
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as “hazardous”)**. Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the “General Terms of Delivery for Products and Services in the Electrical Industry” published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, CeraDiode, CSSP, PhaseCap, PhaseMod, SIFI, SIKOREL, Silver-Cap, SIMID, SIOV, SIP5D, SIP5K, TOPcap, UltraCap, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com