

TACT
SWITCHESNAVIGATION
SWITCHESPUSHBUTTON
SWITCHESTOGGLE
SWITCHESROCKER
SWITCHESSLIDE
SWITCHESSNAP-ACTION
SWITCHESDIP
SWITCHESKEYLOCK
SWITCHESROTARY
SWITCHESDETECTOR
SWITCHESCAP
OPTIONS

SERIES TL 53 SWITCHES

TACT SWITCHES - Dual



FEATURES & BENEFITS

- ▶ Two independent switches in a single package
- ▶ Stacked design
- ▶ Reliable dome contact technology

APPLICATIONS/MARKETS

- ▶ Telecommunications
- ▶ Consumer Electronics
- ▶ Audio/visual
- ▶ Medical
- ▶ Testing/instrumentation
- ▶ Computer/servers/peripherals

SPECIFICATIONS

Contact Rating:	50mA @ 12 VDC
Life Expectancy:	100,000 cycles
Contact Resistance:	100mΩ max., typical @ 2-4 VDC 100mA for both silver and gold plated contacts
Insulation Resistance:	100mΩ min.
Dielectric Strength:	250VAC
Actuation Force:	100 ± 50 gf, 160 ± 50 gf, 250 ± 50 gf
Operating Temperature:	-20°C to 70°C
Travel:	0.25 Typ

MATERIALS

Housing:	Polyester
Actuator:	Acetal
Cover:	Tin plated steel
Contacts:	Silver plated phosphor bronze
Terminals:	Silver plated brass



HOW TO ORDER

SERIES	MODEL NO.	ACTUATOR ("L" Dimension)	OPERATING FORCE	CONTACT MATERIAL
TL	53	(None) = 3.15mm A = 3.85mm B = 5.85mm C = 6.15mm D = 6.85mm E = 7.35mm G = 8.35mm H = 11.85mm	F100 F160 F260	Q = Silver

Actuator Length (L) in mm

(None) = 3.15	C = 6.15	G = 8.35
A = 3.85	D = 6.85	H = 11.85
B = 5.85	E = 7.35	

Operating Force

F100 = 100 ± 50gf
F160 = 160 ± 50gf
F260 = 260 ± 50gf



Example Ordering Number



TL-53-B-F100-Q

Specifications subject to change without notice.

TL 53



SEE

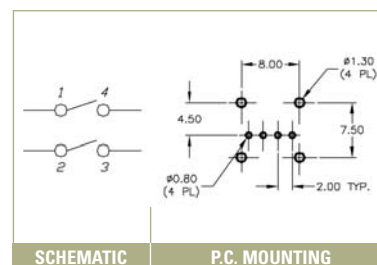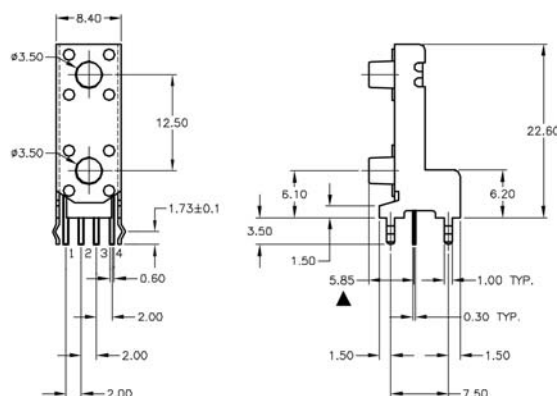

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com