

注1. 図示ノ位置(インシュレータノフランジ面)ニ「社標」及ビ「品名」ガ表示サレル。但シ「F-23L9F」ハ表示サレナイ。

2. シェルハ仮止メデアル。コネクタ使用時ハ嵌合固定ネジヲ使用ノコト。

3. 嵌合固定ネジハ完全ニ締め付ケデアル。

ネジ部ニハ回り止メノ為ニロックタイトガ塗布サレテイル。

4. 嵌合部ハニッケル上金メッキ。スルーホール部ハ錫又ハ錫合金(無鉛)デアル。

5. 基板取り付寸法ニツイテハ、SJ014290ヲ参照ノコト。


6. コンタクト配列ニ付イテハ、SJ010210ヲ参照ノコト。

7. ピン側ニツイテハ、シェル面ニ切欠ガアル。


8. ヒケ逃ゲ形状ハ参考形状デアル。

9. 本製品ハフェライトヲ装着シタモノデアル。

10. 本コネクタノ適用基板厚ハ 1.6 ± 0.2 デアル。

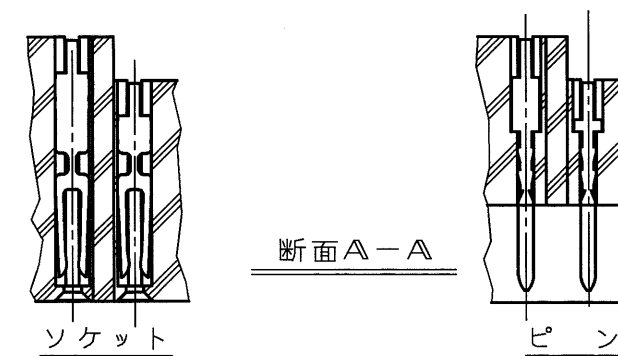

品名	±1	±0.25	±0.25	±0.13	±0.25	±0.25	±0.5	±0.1	コンタクト構造	
	A	B	B'	C	D	D'	E	F	#1	#2
DELC-J 9PAF-23L9FE	30.8	—	16.90	24.99	—	8.34	6.0	0.4	4	5
DELC-J 9SAF	30.8	16.26	—	24.99	7.82	—	6.1	0.4	4	5
DALC-J15PAF	39.1	—	25.24	33.32	—	8.34	6.0	0.4	7	8
DALC-J15SAF	39.1	24.59	—	33.32	7.82	—	6.1	0.4	7	8
DBLC-J25PAF	53.0	—	39.01	47.04	—	8.40	6.0	0.6	12	13
DBLC-J25SAF	53.0	38.30	—	47.04	7.82	—	6.1	0.4	12	13
DCLC-J37PAF	69.3	—	55.47	63.50	—	8.40	6.0	0.6	18	19
DCLC-J37SAF-23L9FE	69.3	54.76	—	63.50	7.82	—	6.1	0.4	18	19

7	フェライト	1	フェライト		
6	嵌合固定ネジ	2	鋼又ハ黄銅	ニッケルメッキ	# 4-4 O U N C
5	コンタクト # 1	表-1	P : 黄銅	注 4	接触部 A u : 0.1 μ m 以上
4	コンタクト # 2	表-1	S : リン青銅	注 4	接触部 A u : 0.1 μ m 以上
3	インシュレータ	1	P B T	(黒 色)	
2	シエル	1	鋼	ニッケルメッキ	
1	アースラグ	2	リン青銅	錫又ハ锡合金(無鉛)	
符 号 NO.	名 称 DESCRIPTION	個 数 QTY.	材 料 MATERIAL	仕 上 FINISH	備 考 REMARKS
仕様書(SPECIFICATION) JACS-1045-7		第1版(ORIGINAL DATE) 2003.3.3		尺 度 (SCALE) 2:1 シリーズ(SERIES) D S D	JAE CONNECTOR.COM 日本航空電子工業株式会社 Reference Only JAPAN AVIATION ELECTRONICS INDUSTRY, LTD. 
公差(GENERAL TOLERANCE)		製図 DR.	村野	名称(TITLE)	 SJ038392
寸法(DIMENSION)		担当 CHK.	高木(洋)	D ※ L C - J * ※ A F - 2 3 L 9 F E	
角度(ANGLES)		査閲 APPD.	-		
. ± . X ± 0.5 . XX ± 0.25 . XXX ±	X° ± X° X' ±	承認 APPD.	金田		
				重量(WEIGHT)	

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com