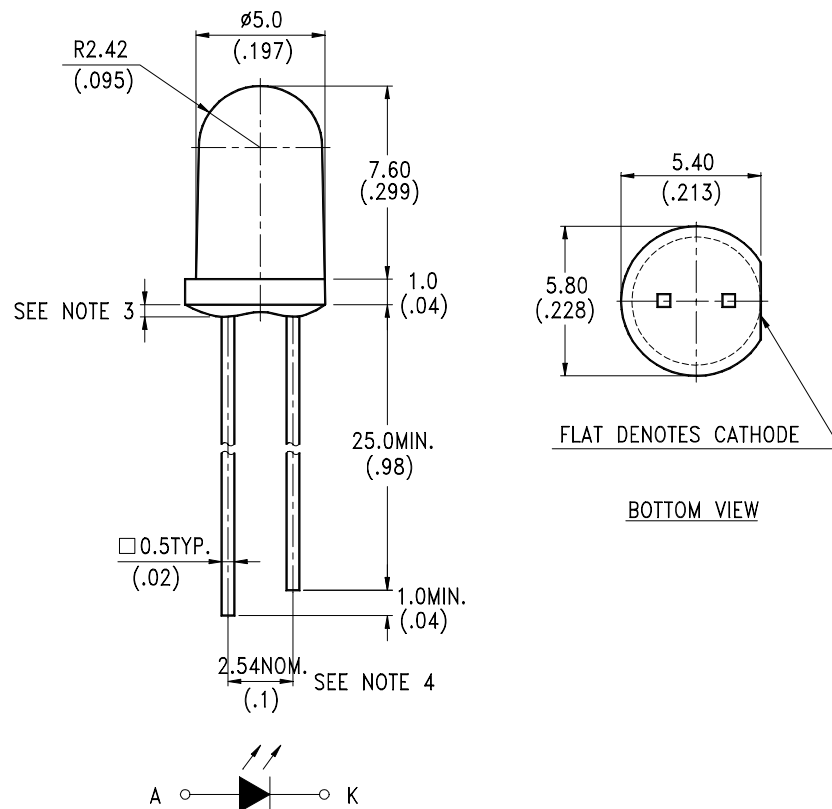


**FEATURES**

- \* SPECIAL FOR HIGH CURRENT AND LOW FORWARD VOLTAGE
- \* HIGH POWER
- \* AVAILABLE FOR PULSE OPERATING
- \* WIDE VIEWING ANGLE
- \* CLEAR TRANSPARENT COLOR PACKAGE

**PACKAGE DIMENSIONS****NOTES:**

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.25\text{mm}$  (.010") unless otherwise noted.
3. Protruded resin under flange is 1.5mm (.059") max.
4. Lead spacing is measured where the leads emerge from the package.
5. Specifications are subject to change without notice.

## ABSOLUTE MAXIMUM RATINGS AT T<sub>A</sub>=25°C

| PARAMETER                                              | MAXIMUM RATING      | UNIT |
|--------------------------------------------------------|---------------------|------|
| Power Dissipation                                      | 150                 | mW   |
| Peak Forward Current (300pps, 10 $\mu$ s pulse)        | 2                   | A    |
| Continuous Forward Current                             | 100                 | mA   |
| Reverse Voltage                                        | 5                   | V    |
| Operating Temperature Range                            | -40°C to + 85°C     |      |
| Storage Temperature Range                              | -55°C to + 100°C    |      |
| Lead Soldering Temperature<br>[1.6mm(.063") From Body] | 260°C for 5 Seconds |      |

## ELECTRICAL OPTICAL CHARACTERISTICS AT T<sub>A</sub>=25°C

| PARAMETER                  | SYMBOL           | MIN. | TYP. | MAX.  | UNIT                | TEST CONDITION         | BIN NO. |
|----------------------------|------------------|------|------|-------|---------------------|------------------------|---------|
| Aperture Radiant Incidence | E <sub>e</sub>   | 0.64 |      | 1.20  | mW/c m <sup>2</sup> | I <sub>F</sub> = 20mA  | BIN B   |
|                            |                  | 0.80 |      | 1.68  |                     |                        | BIN C   |
|                            |                  | 1.12 |      |       |                     |                        | BIN D   |
| Radiant Intensity          | I <sub>E</sub>   | 4.81 |      | 9.02  | mW/sr               | I <sub>F</sub> = 20mA  | BIN B   |
|                            |                  | 6.02 |      | 12.63 |                     |                        | BIN C   |
|                            |                  | 8.42 |      |       |                     |                        | BIN D   |
| Peak Emission Wavelength   | $\lambda_{Peak}$ |      | 940  |       | nm                  | I <sub>F</sub> = 20mA  |         |
| Spectral Line Half-Width   | $\Delta \lambda$ |      | 50   |       | nm                  | I <sub>F</sub> = 20mA  |         |
| Forward Voltage            | V <sub>F</sub>   |      | 1.25 | 1.6   | V                   | I <sub>F</sub> = 50mA  |         |
| Forward Voltage            | V <sub>F</sub>   |      | 1.65 | 2.1   | V                   | I <sub>F</sub> = 250mA |         |
| Reverse Current            | I <sub>R</sub>   |      |      | 100   | $\mu$ A             | V <sub>R</sub> = 5V    |         |
| Viewing Angle (See FIG.6)  | 2 $\theta_{1/2}$ |      | 40   |       | deg.                |                        |         |

## TYPICAL ELECTRICAL / OPTICAL CHARACTERISTICS CURVES

(25°C Ambient Temperature Unless Otherwise Noted)

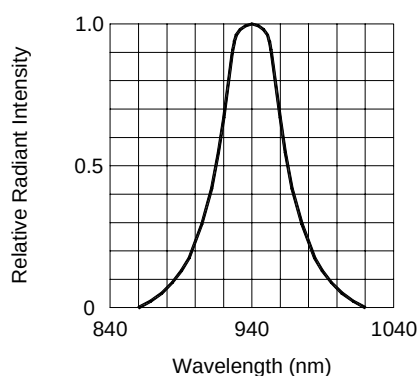


FIG.1 SPECTRAL DISTRIBUTION

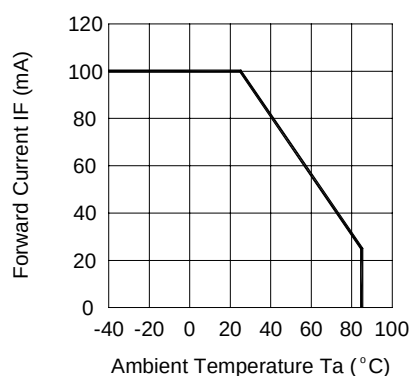


FIG.2 FORWARD CURRENT VS. AMBIENT TEMPERATURE

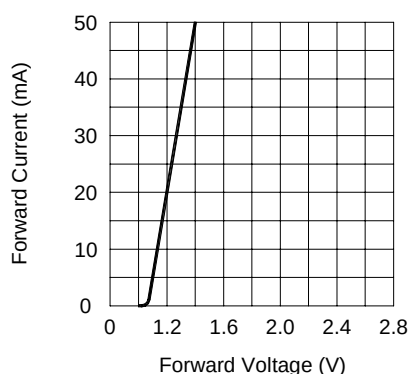


FIG.3 FORWARD CURRENT VS. FORWARD VOLTAGE

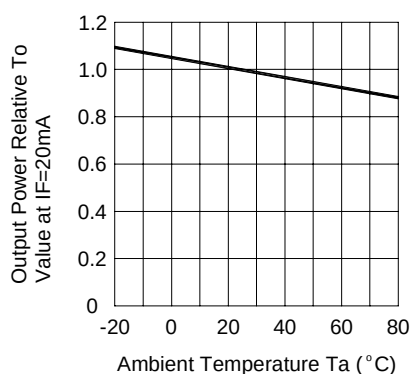


FIG.4 RELATIVE RADIANT INTENSITY VS. AMBIENT TEMPERATURE

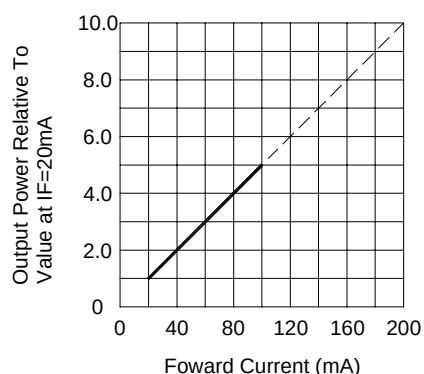


FIG.5 RELATIVE RADIANT INTENSITY VS. FORWARD CURRENT

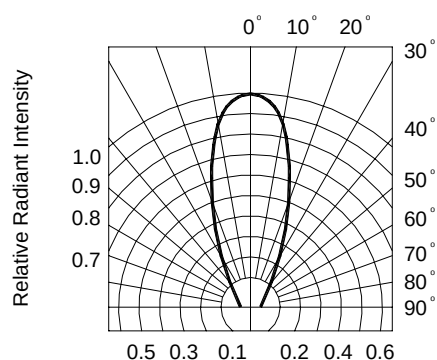


FIG.6 RADIATION DIAGRAM

# AMEYA360

## Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)