
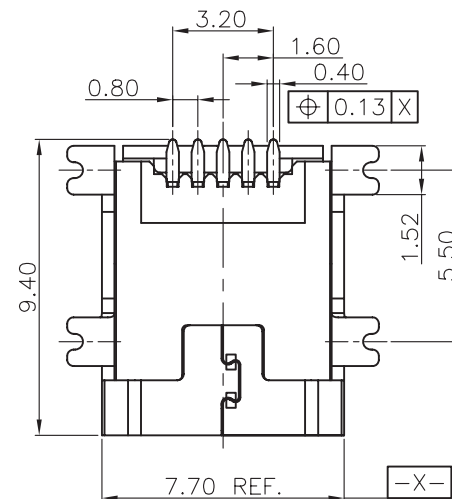
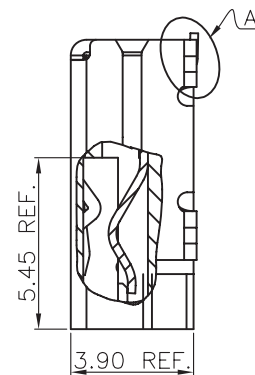


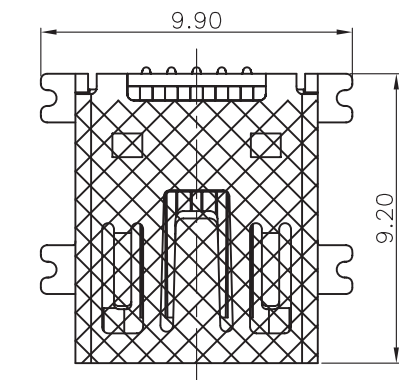

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR: LCP
COLOR: BLACK
CONTACT MATERIAL: COPPER ALLOY
CONTACT TYPE: STAMPED
CONTACT PLATING: SELECTIVE GOLD
SHIELDING: BRASS TIN PLATED
QUALITY CLASS: 1500 MATING CYCLES




ENVIRONMENTAL
OPERATING TEMPERATURE: -40 UP TO 105°C
FLAMABILITY RATING: UL94-V0
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
CURRENT RATING: 1.0 A max
WORKING VOLTAGE: 30V
INSULATOR RESISTANCE: >1000 MOHM
DIELECTRIC WITHSTANDING VOLTAGE: 750V AC/MN
CONTACT RESISTANCE: 20 mOHM MAX

STANDARD
 CERTIFIED: E323964 / MODEL NUMBER 651-1428

SOLDERING
REFLOW PROCESS ONLY

PACKAGING TAPE AND REEL

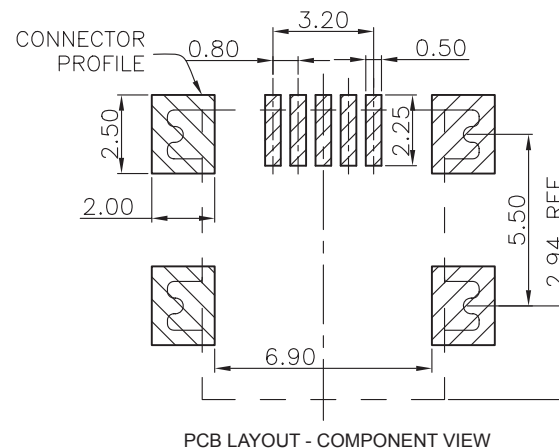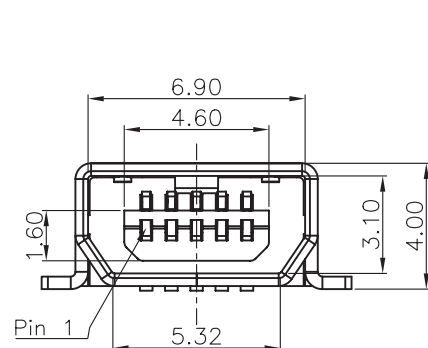

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE $.X = +_{-} 0.2$ $.XX = +_{-} 0.15$		
G							
F							
E	18-FEB-13	DESIGNATION	AR				
D	08-NOV-11	CURRENT RATING	GG	APPROVAL: RJ	UNIT: MM	DESCRIPTION: MINI USB 2.0 SMT TYPE AB 5 CONTACTS	SIZE
C	22-JUN-11	CURRENT RATING	GG				
B	19-NOV-09	STANDARD	JP				
A	31-JUL-08	PDF	CH				
REV	DATE	FILE	BY				
					SCALE:	WERI PART NO: 651 305 142 821	A4
					SHEET: 1/2		
					DRAW: PDJ		

1				2				3				4				5																											
																Note: 1.All dimensions meet EIA-481-3 requirements. 2.Material : Black Conductive Polystyrene Alloy 100% recyclable. 3.Thickness : 0.40±0.05mm 4.Component load per 13" reel :700 pcs. 5.Carton Size:350*350*296(mm) <table><tr><th>Pin No</th><th>W</th><th>A</th><th>PCS/R</th><th>R/CTN</th><th>Q'TY</th></tr><tr><td>05</td><td>24</td><td>29</td><td>700</td><td>9</td><td>9 *700</td></tr></table>																Pin No	W	A	PCS/R	R/CTN	Q'TY	05	24	29	700	9	9 *700
Pin No	W	A	PCS/R	R/CTN	Q'TY																																						
05	24	29	700	9	9 *700																																						
RoHS Compliant				PROJECTION: 				GENERAL TOLERANCE .X = +/_ 0.2 .XX = +/_ 0.15								DESCRIPTION: MINI USB SMT TYPE AB 5 CONTACTS WERI PART NO: 651305142821 SIZE A4																											
G				APPROVAL: RJ				UNIT: MM																																			
F								SCALE:																																			
E								SHEET: 2/2																																			
D								DRAW: PDJ																																			
C																																											
B																																											
A	31-JUL-08	PDF	CH																																								
REV	DATE	FILE	BY																																								

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com