


Suggested Panel Cutout



Maximum Panel Thickness: 0.236 [6.0]


FEATURES:

- Vandal Resistant
- Water Resistant
- Long Life Expectancy


SPECIFICATIONS:

RATING: 2A 48VDC
TEMPERATURE: -20°C to 55°C
ELECTRICAL LIFE: 200,000 Cycles
CONTACT RESISTANCE: 50mΩ Max. at 1A 12VDC
INSULATION RESISTANCE: 1,000MΩ Min.
DIELECTRIC STRENGTH: 2,000VAC for 1 Minute
INGRESS PROTECTION: IP65

Actuator Options





Terminal Options




MATERIALS:

BUSHING: Gold Plated Brass
 Nickel Plated Brass
 Stainless Steel
ACTUATOR: Gold Plated Brass
 Nickel Plated Brass
 Stainless Steel
BASE: Polybutylene Terephthalate, UL94 V-2
SEALING: Silicone
INNER ASSEMBLY: Polyamide 6/6
 Brass
SPRING: Stainless Steel
CONTACT: Silver Plated Brass
TERMINALS: Silver Plated Brass
 Steel
HARDWARE: Nickel Plated Brass

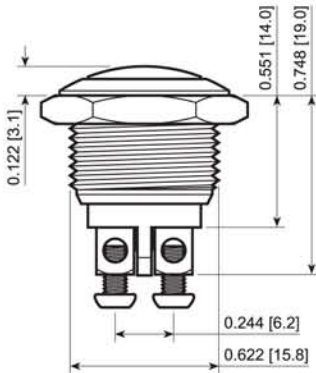

PV2F640SS

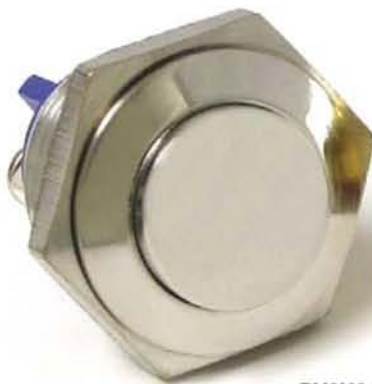

PV2H640SS



PV2S640GG



PV2S640NN

EXAMPLE PART NUMBERS:

PV2F640GG 1P Off-(On)
 Flat Actuator, Gold Plated Finish
 PV2F640NN 1P Off-(On)
 Flat Actuator, Nickel Plated Finish
 PV2F640SS 1P Off-(On)
 Flat Actuator, Stainless Steel Body
 PV2H640GG 1P Off-(On)
 High Actuator, Gold Plated Finish
 PV2H640NN 1P Off-(On)
 High Actuator, Nickel Plated Finish
 PV2H640SS 1P Off-(On)
 High Actuator, Stainless Steel Body
 PV2S640GG 1P Off-(On)
 Domed Actuator, Gold Plated Finish
 PV2S640NN 1P Off-(On)
 Domed Actuator, Nickel Plated Finish
 PV2S640SS 1P Off-(On)
 Domed Actuator, Stainless Steel Body

Series	Actuator Options	Terminal	Function	Rating	Body Finish	Actuator Finish	Contact Material	Marking Options
☐ PV2	☐ F - Flat ☐ H - High ☐ S - Domed	☐ 2 - Solder ☐ 6 - Screw	☐ 1 Pole: ☐ 4 - Off-(On)	☐ 0 - 2A 48VDC	☐ G - Gold ☐ N - Nickel ☐ S - Polished Stainless Steel ☐ B - Brushed Stainless Steel	☐ G - Gold ☐ N - Nickel ☐ S - Polished Stainless Steel ☐ B - Brushed Stainless Steel	☐ None - Silver ☐ G - Gold	☐ None - No Marking ☐ M01 - Power Symbol ☐ Custom Markings Available

Notes:
 Additional material options available upon request. Please ask your salesperson.



E-SWITCH®

www.e-switch.com

800.867.2717

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com