

POWER TRANSFORMER CHASSIS MOUNT: TOROIDAL WORLD SERIES

VPT18-2780

Electrical Specifications (@25C)

1. Maximum Power: 50VA

2. Input Voltage: Series: 230VAC, 50/60Hz

Parallel: 115VAC, 50/60Hz

3. Output Voltage: Series: 18VAC CT @ 2.78A

Parallel: 9.0VAC @ 5.56A

4. Voltage Regulation: 12% TYP from full load to no load

5. Temperature Rise: 40°C TYP

6. Hipot: 4000VAC, Primary to Secondary

7. Efficiency: 86% TYP. @ full load

Construction:

The toroidal construction inherently helps reduce stray fields, increases efficiency and minimizes size compared to traditional EI transformers. Built with Class B (130°) insulation system.

Safety:

World Series Transformers are designed and manufactured to meet most International Safety agency standards.

Agency File:

UL: File E122529, UL 506

CE: EN 61558-1:2005, EN 61558-2-6:1995, Low Voltage Directive (LVD) EN 6-000-6-6:2001+A11:2004, EN 55014-1:2000+A1:2001+A2:2002, EN 6100-6-1:2001, EN 55014-2:1997+A1:2001, Electromagnetic Compatibility (EMC)



Dimensions (mm):

H*	I.D.	O.D.
33.0	25.0	80.0

*Add 3mm to the height for mounting hardware Weight: 0.6Kg

Mounting:

Transformer is provided with one metal mounting plate, two rubber pads, M5 x 45mm bolt, nut, spring and flat washer.

Connections:

Transformer is provided with 8" (200mm) long, 0.25" (6mm) stripped and tinned, stranded UL 1015 lead wire.

Input¹: Series – BLUE and BROWN, Jumper GRAY to VIOLET

Parallel – BLUE and BROWN, Jumper BLUE to VIOLET, GRAY to BROWN

Output1: Series - BLACK and YELLOW, Jumper RED to ORANGE


Parallel - BLACK and YELLOW, Jumper BLACK to ORANGE, RED to YELLOW


* Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.

Web: www.TriadMagnetics.com Phone 951-277-0757 Fax 951-277-2757

22520B Temescal Canyon Road Corona, California 92883



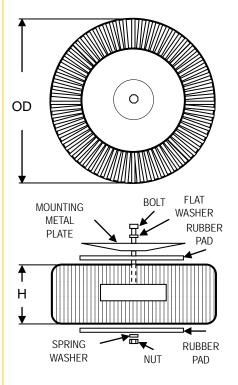



Release Date: May 3, 2011

¹ Primary and secondary windings are designed to be connected in series or parallel. Windings are not intended to be used independently.

AMEYA360 Components Supply Platform

Authorized Distribution Brand:

























Website:

Welcome to visit www.ameya360.com

Contact Us:

> Address:

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd Minhang District, Shanghai , China

Sales:

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

Customer Service :

Email service@ameya360.com

Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com