

NOTES:

1.0 MATERIALS:

- 1.1 HOUSING & NUT: STAINLESS STEEL PER ASTM-A582, TYPE 303.
- 1.2 CENTER CONTACT: BERYLLIUM COPPER ROD ALLOY C172, PER ASTM-B196.
- 1.3 DIELECTRIC: PTFE FLUOROCARBON PER ASTM-D1457.

2.0 PLATING:

- 2.1 HOUSING & NUT: PASSIVATED PER MIL-F-14072 AND QQ-P-35
- 2.2 CENTER CONTACT: GOLD PER MIL-G-45204, TYPE II, CLASS 2.


3.0 ELECTRICAL SPECIFICATIONS:

- 3.1 FREQUENCY RANGE: DC to 18.0 GHz
- 3.2 VSWR: 1.25:1 MAX.
- 3.3 IMPEDANCE: 50 OHMS

4.0 MARKING: NO MARKING REQUIRED

5.0 DIMENSIONS IN PARENTHESIS ARE IN MILLIMETERS.

SMA JACK
PER MIL-PRF-39012

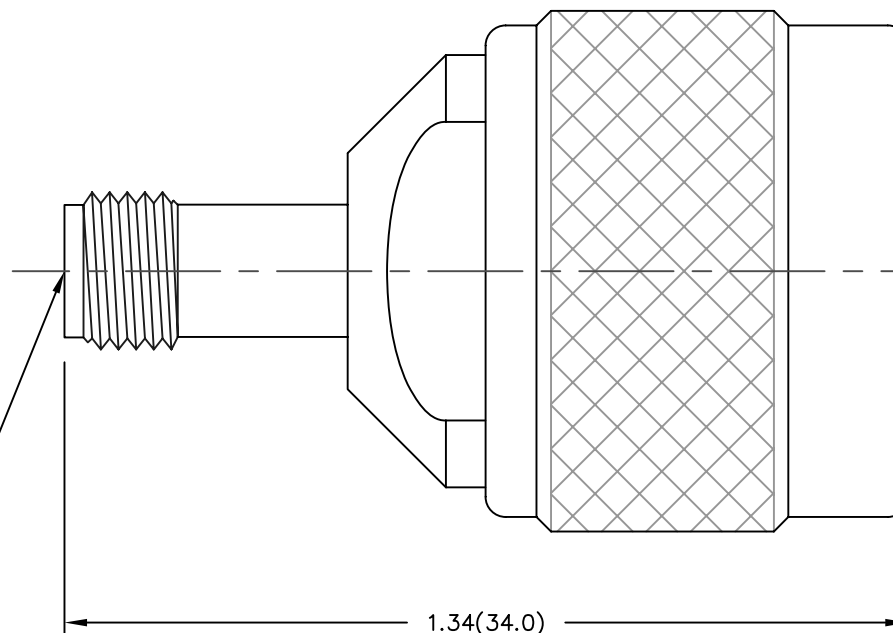

TYPE N PLUG
PER MIL-PRF-39012

DWG NO. WAS: 04049-01-00

REV.	DESCRIPTION	DATE
-	RELEASED	11/19/92
A	ECR 1749	10/12/82
B	ECR 6545	7/10/89
C	ECR 6933	4/25/90
CI	UPDATE MODEL NO	2/21/91
D	REDRAW ON CAD	11/16/92
D1	ADDED TITLEBLOCK	3/15/05

NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Emerson Network Power.

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
AND TOLERANCES ARE:
3 PLACE DECIMALS ±.005
2 PLACE DECIMALS ±.02
FRACTIONS ±1/64
PARALLELITY: T.I.R. _____
FLATNESS: T.I.R. _____
CONCENTRICITY: T.I.R. _____
ANGLES AND PERPENDICULARITY: ±1°

CAGE CODE 34078		MIDWEST MICROWAVE	
 EMERSON. Network Power Connectivity Solutions		TITLE ADAPTER TYPE N MALE TO SMA FEMALE OUTLINE DRAWING	
		DRAWING NUMBER ADT-2681-NM-SMF-02-01	REV. D1
DRAWN/DATE A.BEATTY 11/16/92	ENG./DATE A.OSCA 11/19/92	CHECKED/DATE M.HOLLMAN 11/17/92	APPROVED/DATE
SCALE: 5=1		SHEET 1 of 1	

MODEL NUMBER
ADT-2681-NM-SMF-02

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com