

## F-371P

### Electrical Specifications (@25C)

1. Maximum Power: 24.0 VA
2. Primary: Series: 230V@50/60 Hz  
Parallel: 115V@50/60Hz
3. Secondary: Series: 12.6V CT @ 2.00 Amps  
Parallel: 6.3V CT @ 4.00 Amps

### Description:

The F-371P is part of a wide selection of plug-in types that meet the needs of PC boards and solid state power supply design. This transformer can satisfy power as well as control and instrumentation applications.

### Construction:

Wound on a single channel nylon bobbin. Materials are UL recognized, Class B (130° C) rated.

### Safety:

These products are 100% hipot tested with an insulation of 1500V between primary and secondary windings.

### Dimensions:

Units: In inches


A	B	C	D	E
1.375	1.625	2.250	0.250	2.109

Pin length: 0.187 in.

Pin size: 0.20 x .041 in.

Weight: 13.3 oz

### Schematic:






Primary: Series - 1 to 4, Jumper 2 to 3  
Parallel - 1 to 4, Jumper 1 to 3 and 2 to 4

Secondary: Series - 5 to 8, Jumper 6 to 7  
Parallel - 5 to 8, Jumper 5 to 7 and 6 to 8

**RoHS Compliance:** As of manufacturing date February 2005, all standard products meet the requirements of 2002/95/EC, known as the RoHS initiative.

\* Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.

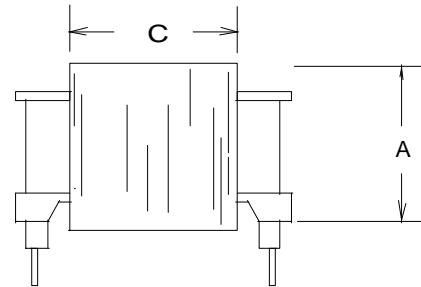

# AMEYA360

## Components Supply Platform

### Authorized Distribution Brand :



### Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

### Contact Us :

#### ➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

#### ➤ Sales :

Direct +86 (21) 6401-6692  
Email amall@ameya360.com  
QQ 800077892  
Skype ameyasales1 ameyasales2

#### ➤ Customer Service :

Email service@ameya360.com

#### ➤ Partnership :

Tel +86 (21) 64016692-8333  
Email mkt@ameya360.com