

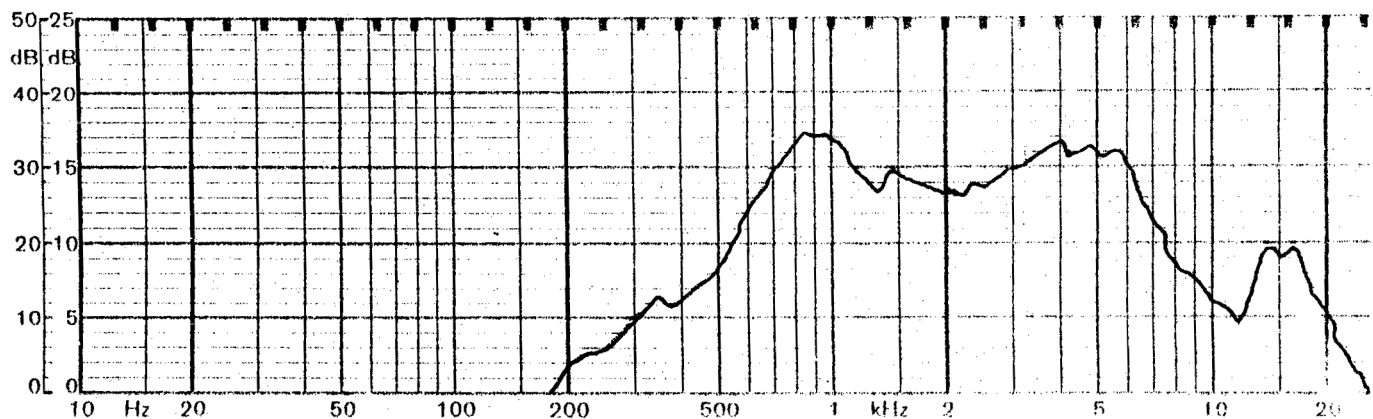

CUI INC
Part No: GC0201MAP-1
Description: speaker
Date: 5/21/2007
Unit: mm
Page No: 1 of 2

Specifications

Nominal Size	20 mm		
Impedance	8 Ohm $\pm$ 15%	at	1.5 KHz 1 V
Resonant frequency	850 Hz $\pm$ 170 Hz	at	1 V
Sound pressure level	81 dB/w $\pm$ 3 dB	0.4 w 50 cm ave. at 0.8K, 1K, 1.2K, 1.5K Hz	
Response	Fo Hz ~ 7 KHz max 10 dB		
Input power	Nominal 0.4 W	Handling capacity	0.8 W
Operation	must be normal at program source 0.4 W		
Buzz, rattle, etc.	must be normal at sine wave 1.8 V		
Magnet	Size: 8.0 x 1.0 mm		
Load test	White noise 0.4 W	for	5 hours
Heat test	65 $\pm$ 2° C	20-50% R.H.	5 hours
Humidity test	50 $\pm$ 2° C	90-95% R.H.	5 hours

Frequency Response Curve

Potentiometer range	50 dB
Rectifier	RMS
Lower limit frequency	20 Hz
Wr. speed	100 mm/sec


Zero level 50 dB

Initial Here: _____



CUI INC

Part No: GC0201MAP-1

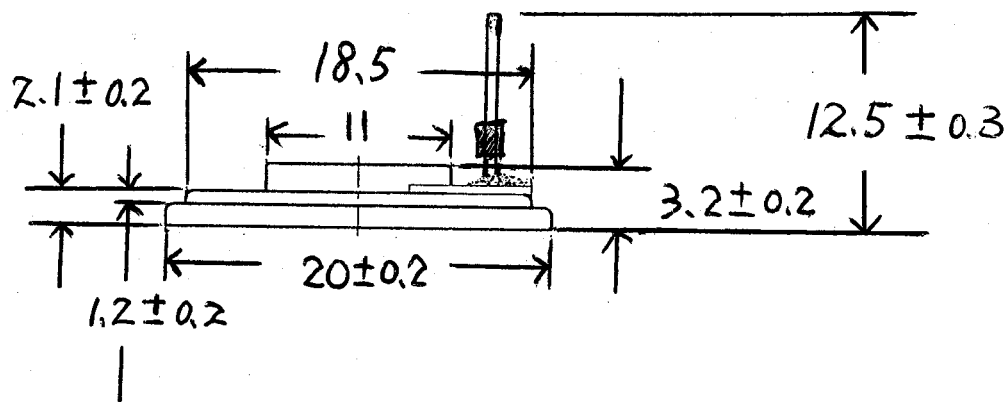
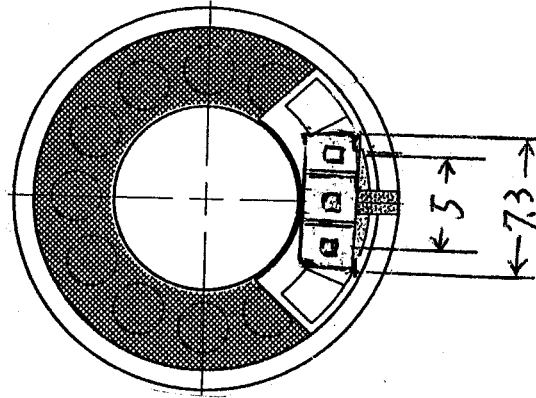
Description: speaker

Date: 5/21/2007

Unit: mm

Page No: 2 of 2

Mechanical Drawing



Initial Here: _____



AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com