


# Standard Rectifier Module

| 3~<br>Rectifier |          |
|-----------------|----------|
| $V_{RRM}$       | = 1600 V |
| $I_{DAV}$       | = 105 A  |
| $I_{FSM}$       | = 750 A  |


## 3~ Rectifier Bridge

Part number

VUO98-16NO7

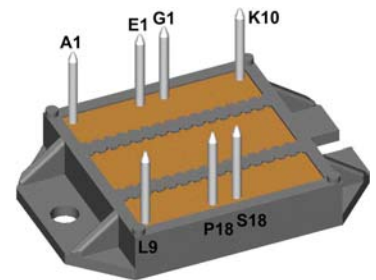

 E72873



### Features / Advantages:

- Package with DCB ceramic
- Improved temperature and power cycling
- Planar passivated chips
- Very low forward voltage drop
- Very low leakage current

### Applications:


- Diode for main rectification
- For three phase bridge configurations
- Supplies for DC power equipment
- Input rectifiers for PWM inverter
- Battery DC power supplies
- Field supply for DC motors

### Package: ECO-PAC2

- Industry standard outline
- RoHS compliant
- Soldering pins for PCB mounting
- Height: 9 mm
- Base plate: DCB ceramic
- Reduced weight
- Advanced power cycling

| Rectifier  |                                              |                                                   |                                                     | Ratings                        |      |      |                   |
|------------|----------------------------------------------|---------------------------------------------------|-----------------------------------------------------|--------------------------------|------|------|-------------------|
| Symbol     | Definition                                   | Conditions                                        |                                                     | min.                           | typ. | max. | Unit              |
| $V_{RSM}$  | max. non-repetitive reverse blocking voltage | $T_{VJ} = 25^{\circ}\text{C}$                     |                                                     |                                |      | 1700 | V                 |
| $V_{RRM}$  | max. repetitive reverse blocking voltage     | $T_{VJ} = 25^{\circ}\text{C}$                     |                                                     |                                |      | 1600 | V                 |
| $I_R$      | reverse current                              | $V_R = 1600\text{ V}$                             | $T_{VJ} = 25^{\circ}\text{C}$                       |                                |      | 100  | $\mu\text{A}$     |
|            |                                              | $V_R = 1600\text{ V}$                             | $T_{VJ} = 150^{\circ}\text{C}$                      |                                |      | 1.5  | mA                |
| $V_F$      | forward voltage drop                         | $I_F = 40\text{ A}$                               | $T_{VJ} = 25^{\circ}\text{C}$                       |                                |      | 1.14 | V                 |
|            |                                              | $I_F = 120\text{ A}$                              |                                                     |                                |      | 1.48 | V                 |
|            |                                              | $I_F = 40\text{ A}$                               | $T_{VJ} = 125^{\circ}\text{C}$                      |                                |      | 1.06 | V                 |
|            |                                              | $I_F = 120\text{ A}$                              |                                                     |                                |      | 1.51 | V                 |
| $I_{DAV}$  | bridge output current                        | $T_C = 115^{\circ}\text{C}$<br>rectangular        | $T_{VJ} = 150^{\circ}\text{C}$<br>$d = \frac{1}{3}$ |                                |      | 105  | A                 |
| $V_{FO}$   | threshold voltage                            | } for power loss calculation only                 |                                                     | $T_{VJ} = 150^{\circ}\text{C}$ |      | 0.81 | V                 |
| $r_F$      | slope resistance                             |                                                   |                                                     |                                |      | 5.9  | m $\Omega$        |
| $R_{thJC}$ | thermal resistance junction to case          |                                                   |                                                     |                                |      | 0.7  | K/W               |
| $R_{thCH}$ | thermal resistance case to heatsink          |                                                   |                                                     |                                | 0.3  |      | K/W               |
| $P_{tot}$  | total power dissipation                      | $T_C = 25^{\circ}\text{C}$                        |                                                     |                                |      | 175  | W                 |
| $I_{FSM}$  | max. forward surge current                   | $t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$  | $T_{VJ} = 45^{\circ}\text{C}$                       |                                |      | 750  | A                 |
|            |                                              | $t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$ | $V_R = 0\text{ V}$                                  |                                |      | 810  | A                 |
|            |                                              | $t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$  | $T_{VJ} = 150^{\circ}\text{C}$                      |                                |      | 640  | A                 |
|            |                                              | $t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$ | $V_R = 0\text{ V}$                                  |                                |      | 690  | A                 |
| $I^2t$     | value for fusing                             | $t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$  | $T_{VJ} = 45^{\circ}\text{C}$                       |                                |      | 2.82 | kA <sup>2</sup> s |
|            |                                              | $t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$ | $V_R = 0\text{ V}$                                  |                                |      | 2.73 | kA <sup>2</sup> s |
|            |                                              | $t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$  | $T_{VJ} = 150^{\circ}\text{C}$                      |                                |      | 2.05 | kA <sup>2</sup> s |
|            |                                              | $t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$ | $V_R = 0\text{ V}$                                  |                                |      | 1.98 | kA <sup>2</sup> s |
| $C_J$      | junction capacitance                         | $V_R = 400\text{ V}; f = 1\text{ MHz}$            |                                                     |                                | 11   |      | pF                |

| Package ECO-PAC2 |                                                              |                      | Ratings |      |      |      |
|------------------|--------------------------------------------------------------|----------------------|---------|------|------|------|
| Symbol           | Definition                                                   | Conditions           | min.    | typ. | max. | Unit |
| $I_{RMS}$        | RMS current                                                  | per terminal         |         |      | 100  | A    |
| $T_{stg}$        | storage temperature                                          |                      | -40     |      | 125  | °C   |
| $T_{VJ}$         | virtual junction temperature                                 |                      | -40     |      | 150  | °C   |
| Weight           |                                                              |                      |         | 24   |      | g    |
| $M_D$            | mounting torque                                              |                      | 1.5     |      | 2    | Nm   |
| $d_{Spp/App}$    | creepage distance on surface   striking distance through air | terminal to terminal | 6.0     |      |      | mm   |
| $d_{Spb/Apb}$    |                                                              | terminal to backside | 10.0    |      |      | mm   |
| $V_{ISOL}$       | isolation voltage                                            | t = 1 second         | 3000    |      |      | V    |
|                  |                                                              | t = 1 minute         | 2500    |      |      | V    |

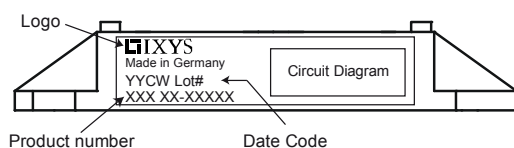

| Ordering | Part Number | Marking on Product | Delivery Mode | Quantity | Code No. |
|----------|-------------|--------------------|---------------|----------|----------|
| Standard | VUO98-16NO7 | VUO98-16NO7        | Box           | 25       | 494526   |

### Equivalent Circuits for Simulation

\* on die level




$T_{VJ} = 150\text{ °C}$



Rectifier

|             |                    |      |    |
|-------------|--------------------|------|----|
| $V_{0\max}$ | threshold voltage  | 0.81 | V  |
| $R_{0\max}$ | slope resistance * | 4.6  | mΩ |

## Outlines ECO-PAC2

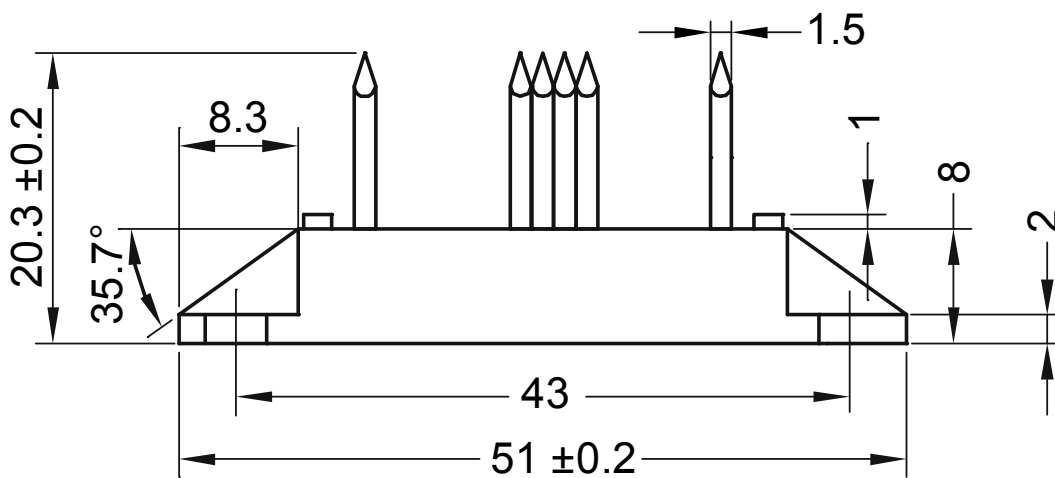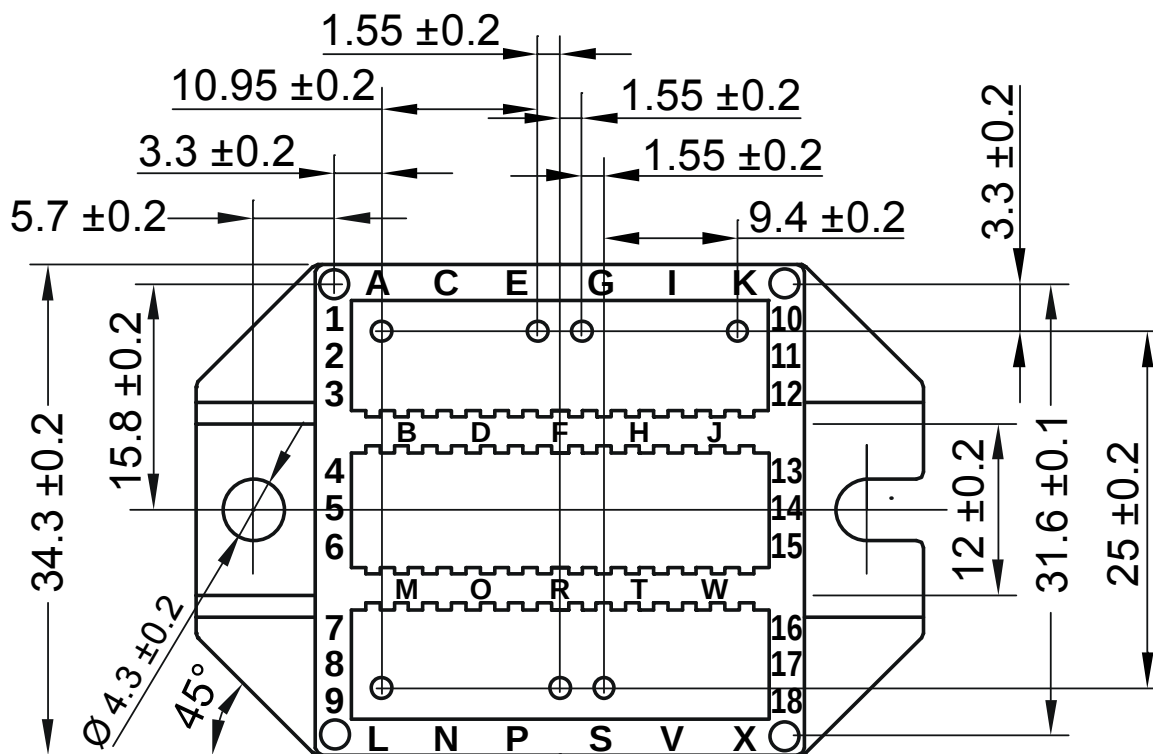

## Rectifier

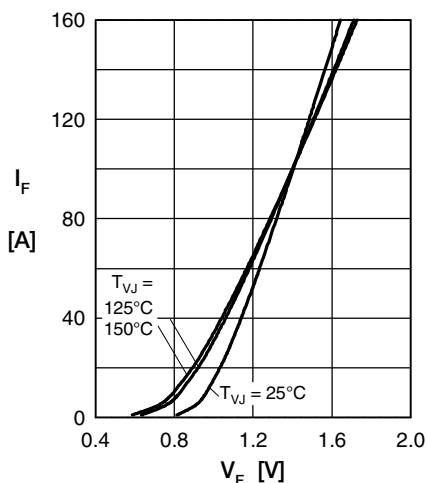


Fig. 1 Forward current versus voltage drop per diode

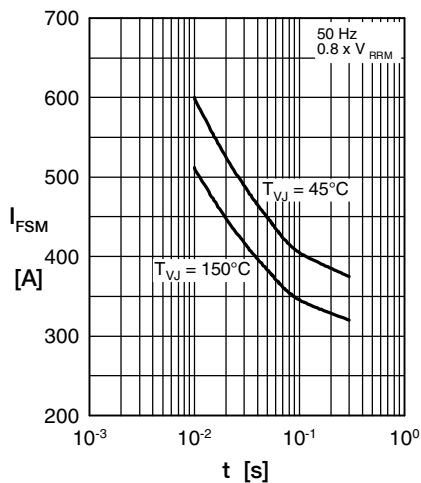


Fig. 2 Surge overload current

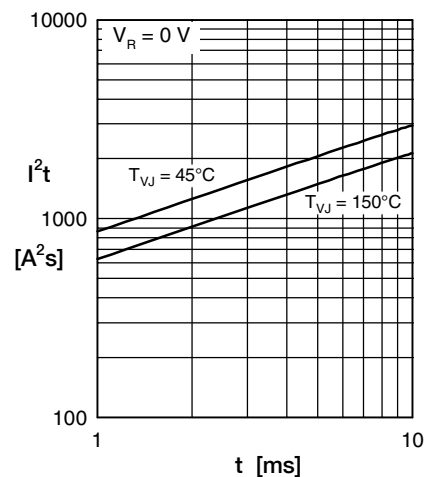


Fig. 3  $I^2t$  versus time per diode

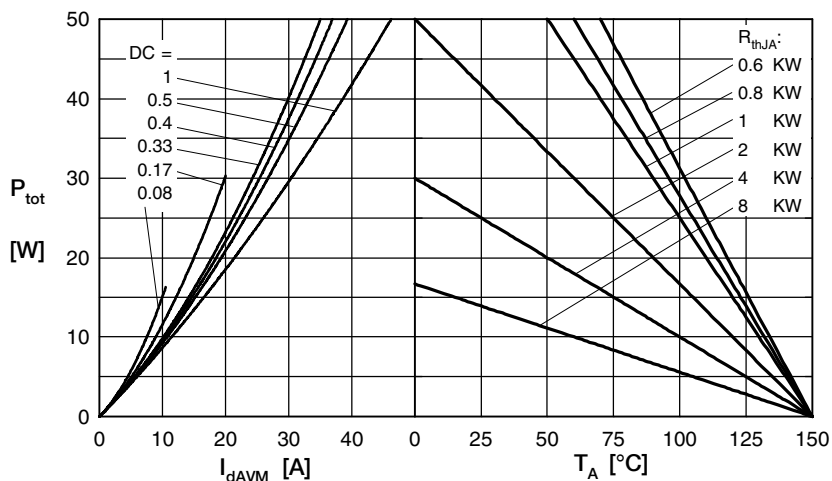


Fig. 4 Power dissipation vs. direct output current & ambient temperature

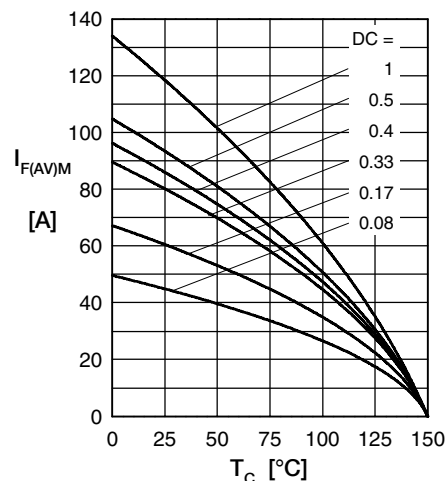


Fig. 5 Max. forward current vs. case temperature

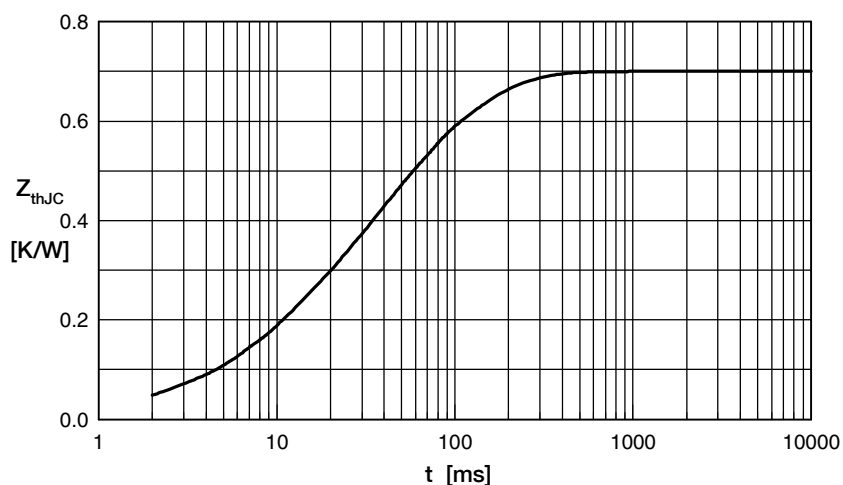


Fig. 6 Transient thermal impedance junction to case

Constants for  $Z_{thJC}$  calculation:

| i | $R_{th}$ (K/W) | $t_i$ (s) |
|---|----------------|-----------|
| 1 | 0.09           | 0.012     |
| 2 | 0.05           | 0.007     |
| 3 | 0.32           | 0.036     |
| 4 | 0.24           | 0.102     |

# AMEYA360

## Components Supply Platform

### Authorized Distribution Brand :



### Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

### Contact Us :

#### ➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

#### ➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype ameyasales1 ameyasales2

#### ➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

#### ➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)