

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR: LCP
COLOR: BLACK
CONTACT MATERIAL: COPPER ALLOY
CONTACT TYPE: STAMPED
CONTACT PLATING: TIN
QUALITY CLASS: 25 MATING CYCLES
PITCH: 3.00MM

ENVIRONMENTAL
OPERATING TEMPERATURE: -40 UP TO 105°C
FLAMABILITY RATING: UL94-V0
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
CURRENT RATING:5A
WORKING VOLTAGE: 250V AC
INSULATOR RESISTANCE: >1000 MOHM
DIELECTRIC WITHSTANDING VOLTAGE: 1500V AC/MN
CONTACT RESISTANCE: 10 mOHM MAX



STANDARD
 CERTIFIED: E323964

SOLDERING
JEDEC LEAD FREE WAVE SOLDERING

PACKAGING
TRAY

DIMENSION
A = 3.00 x (NB. PIN - 1)
B = 3.00 x (NB. PIN + 1) + 0.65

PCB LAYOUT - COMPONENT VIEW

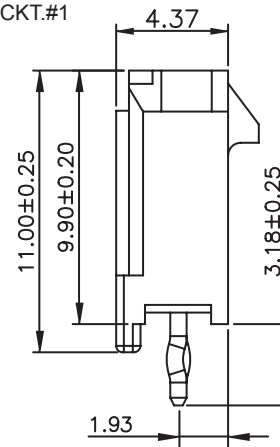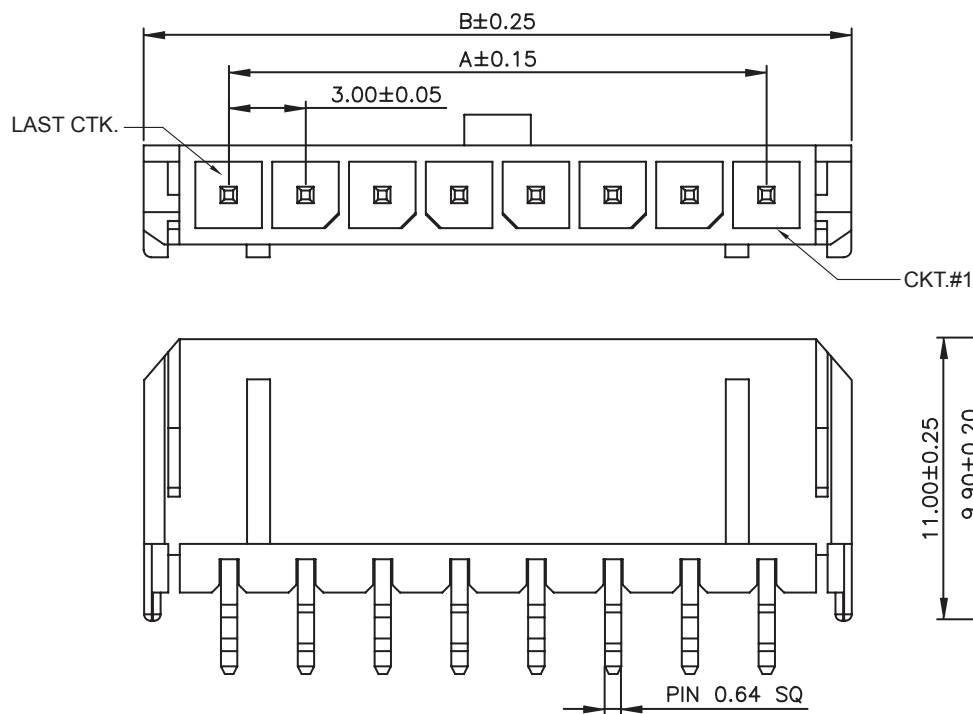

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE $.X = \pm 0.2$ $.XX = \pm 0.15$		DESCRIPTION: 3.00MM MALE SINGLE ROW VERTICAL HEADER WERI PART NO: 662 0xx 111 22	SIZE A4
J	26-SEP-14	DRAWING	AS	APPROVAL: BBu	UNIT: MM			
I	17-FEB-14	SOLDERING	QL		SCALE:			
H	29-JUL-13	DWG & CARAC	QL		SHEET: 1/3			
REV	DATE	FILE	BY		DRAW: AS			

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com