

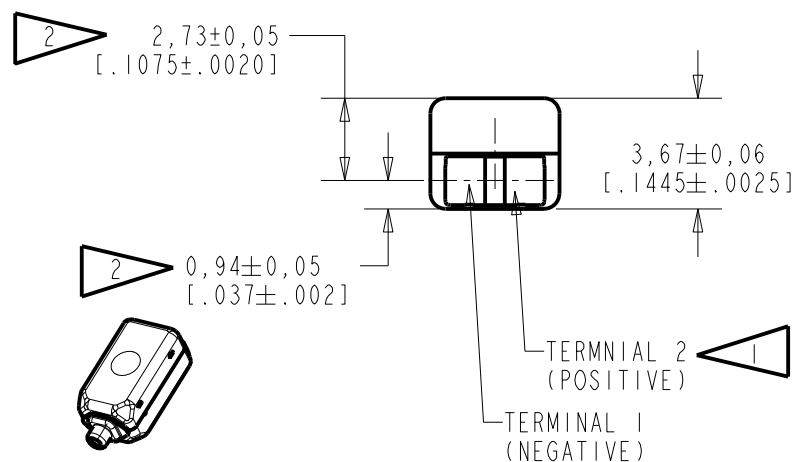


EC-23095-000

SHT 1.1


NOTES:

- 1 A POSITIVE GOING VOLTAGE AT TERMINAL 2, RELATIVE TO TERMINAL 1, CAUSES A DECREASE IN PRESSURE AT THE SOUND OUTLET.
- 2 LOCATED FROM TWO SURFACES FOR CUSTOMER CONVENIENCE. ONLY APPLICABLE FROM ONE SURFACE, NOT TO BE USED TOGETHER.

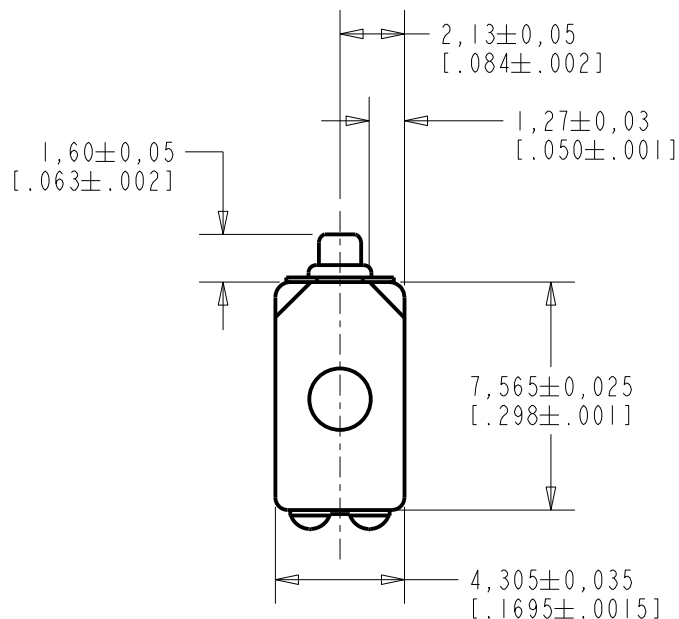

SCALE 2:1
NOMINAL WEIGHT
.42 GRAMS

DIMENSIONS IN MILLIMETERS [INCHES]

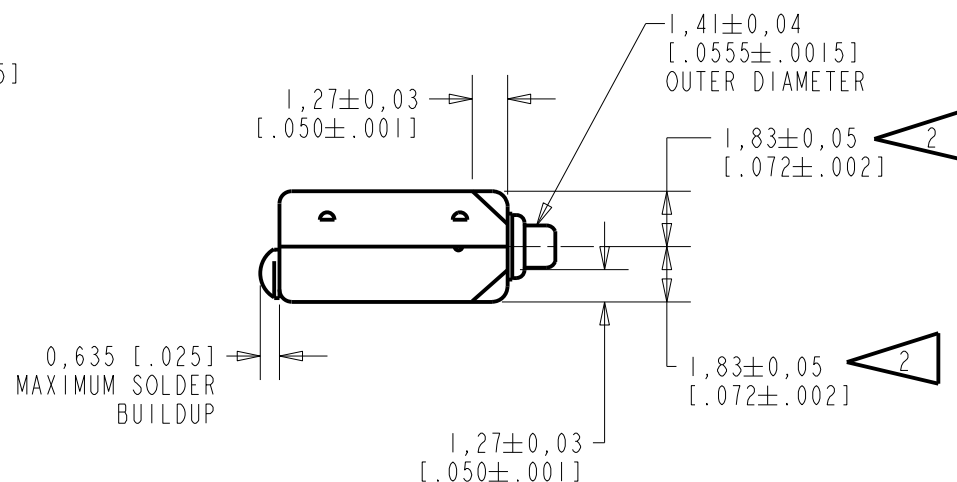

Revision	C.O. #	Implementation Date	RELEASE LEVEL	REVISION
C	CI0115009	7-10-13	Active	C
B	CI0106330	9-3-07		
A	CI0103420	11-14-05		

SCALE:

4:1

DO NOT SCALE DRAWING

TITLE:

RECEIVER

OUTLINE DRAWING

EC-23095-000

SHT 1.1


DR. BY	DATE
CRG	11-14-05
CK. BY	DATE
GJP	11-22-05
APP. BY	DATE
GJP	11-22-05

KE111ASIZE.FRM

Rev: B

KNOWLES ELECTRONICS
ITASCA, ILLINOIS U.S.A.

NO DAMPING

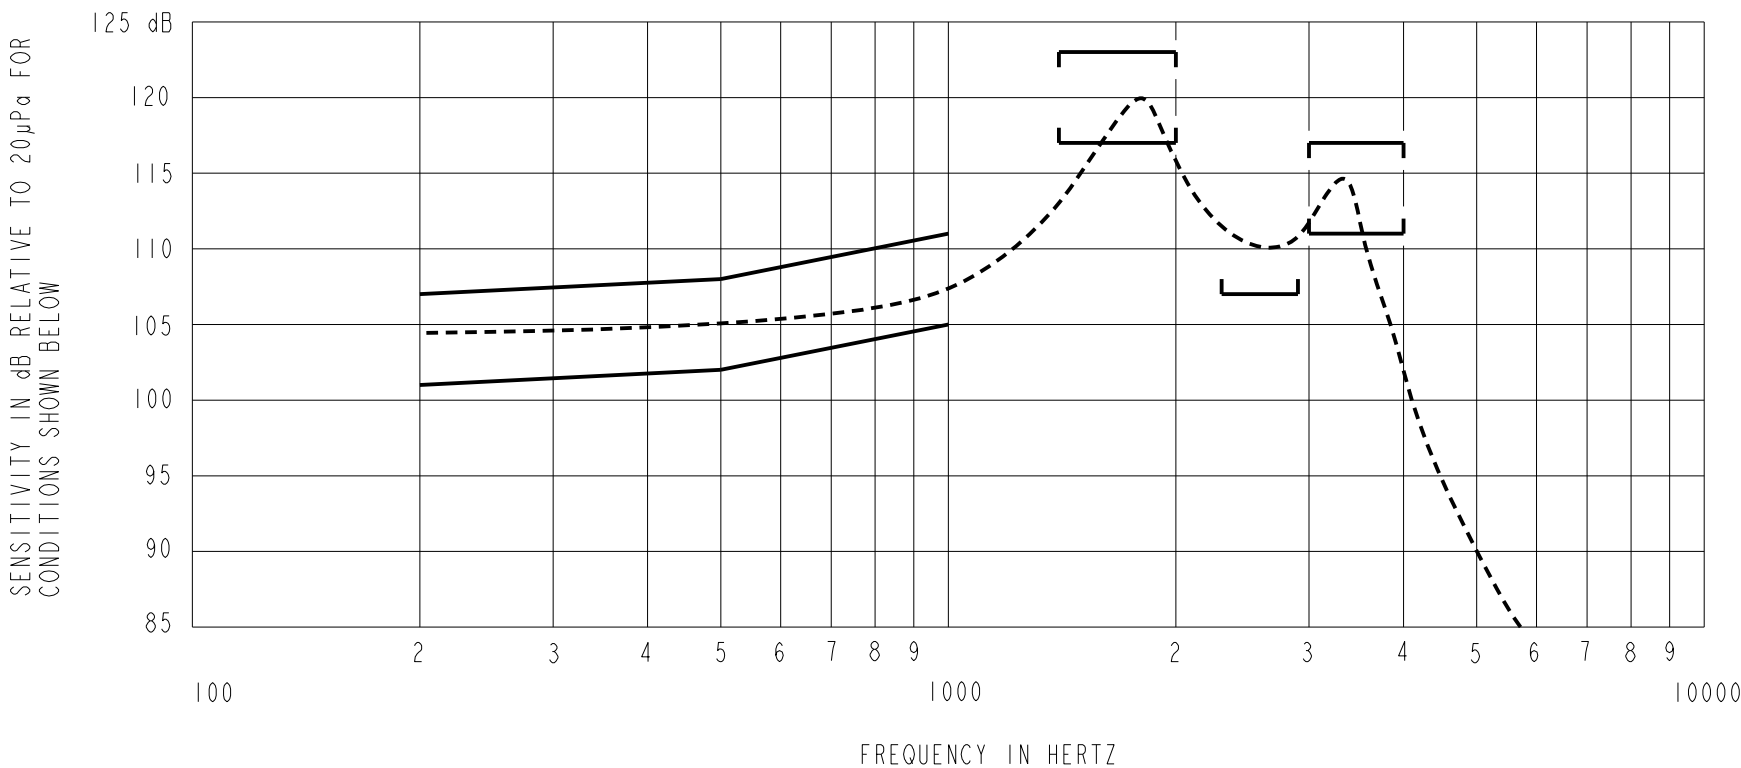

NOTES:

1. MEASUREMENTS MADE USING 10mm (.394") OF 1mm (.039") ID TUBE CONNECTED TO A SIMULATED ANSI S3.7 TYPE HA-3 COUPLER . (IEC 60318-5).
2. SENSITIVITY
- | FREQUENCY | MIN. | MAX. |
|-----------|-------|-------|
| 200 | 101.0 | 107.0 |
| 500 | 102.0 | 108.0 |
| 1000 | 105.0 | 111.0 |
| 1400-2000 | 117.0 | 123.0 |
| 2300-2900 | 107.0 | --- |
| 3000-4000 | 111.0 | 117.0 |
3. RESPONSE, IMPEDANCE, AND DISTORTION MEASUREMENTS MADE USING THE ELECTRICAL TEST CONDITIONS SHOWN BELOW.
4. ELECTRICAL SOURCE IMPEDANCE MUST BE GREATER THAN 20 TIMES 1KHz IMPEDANCE FOR TEST CONDITIONS SHOWN BELOW.
5. INDIVIDUAL SPECIFICATIONS:

PORT LOCATION	IMPEDANCE OHMS ±15%		DCR @20°C OHMS ±10%	DISTORTION		ELECTRICAL TEST CONDITIONS	
	1KHz	500Hz		MAX. %	FREQ Hz	AC mA RMS	DC mA
12S	1600	800	376	10	800	0.54	0.77

Revision	C.O. #	Implementation Date	RELEASE LEVEL		REVISION
C	C10115009	7-10-13	Active		C
B	C10106330	9-3-07			
A	C10103420	11-14-05			
TITLE:			WHEN TEST LIMITS ARE USED TO ESTABLISH INCOMING INSPECTION ACCEPTANCE/REJECTION CRITERIA, CORRELATION OF TEST EQUIPMENT WITH KNOWLES IS ALSO REQUIRED FOR ELIMINATION OF EQUIPMENT AND TEST METHOD VARIATION		DR. BY DATE
			RECEIVER		CRG 11-14-05
PERFORMANCE SPECIFICATION			EC-23095-000		CK. BY DATE
			SHT 2.1		GJP 11-22-05
					APP. BY DATE
					GJP 11-22-05

KNOWLES ELECTRONICS
ITASCA, ILLINOIS U.S.A.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com